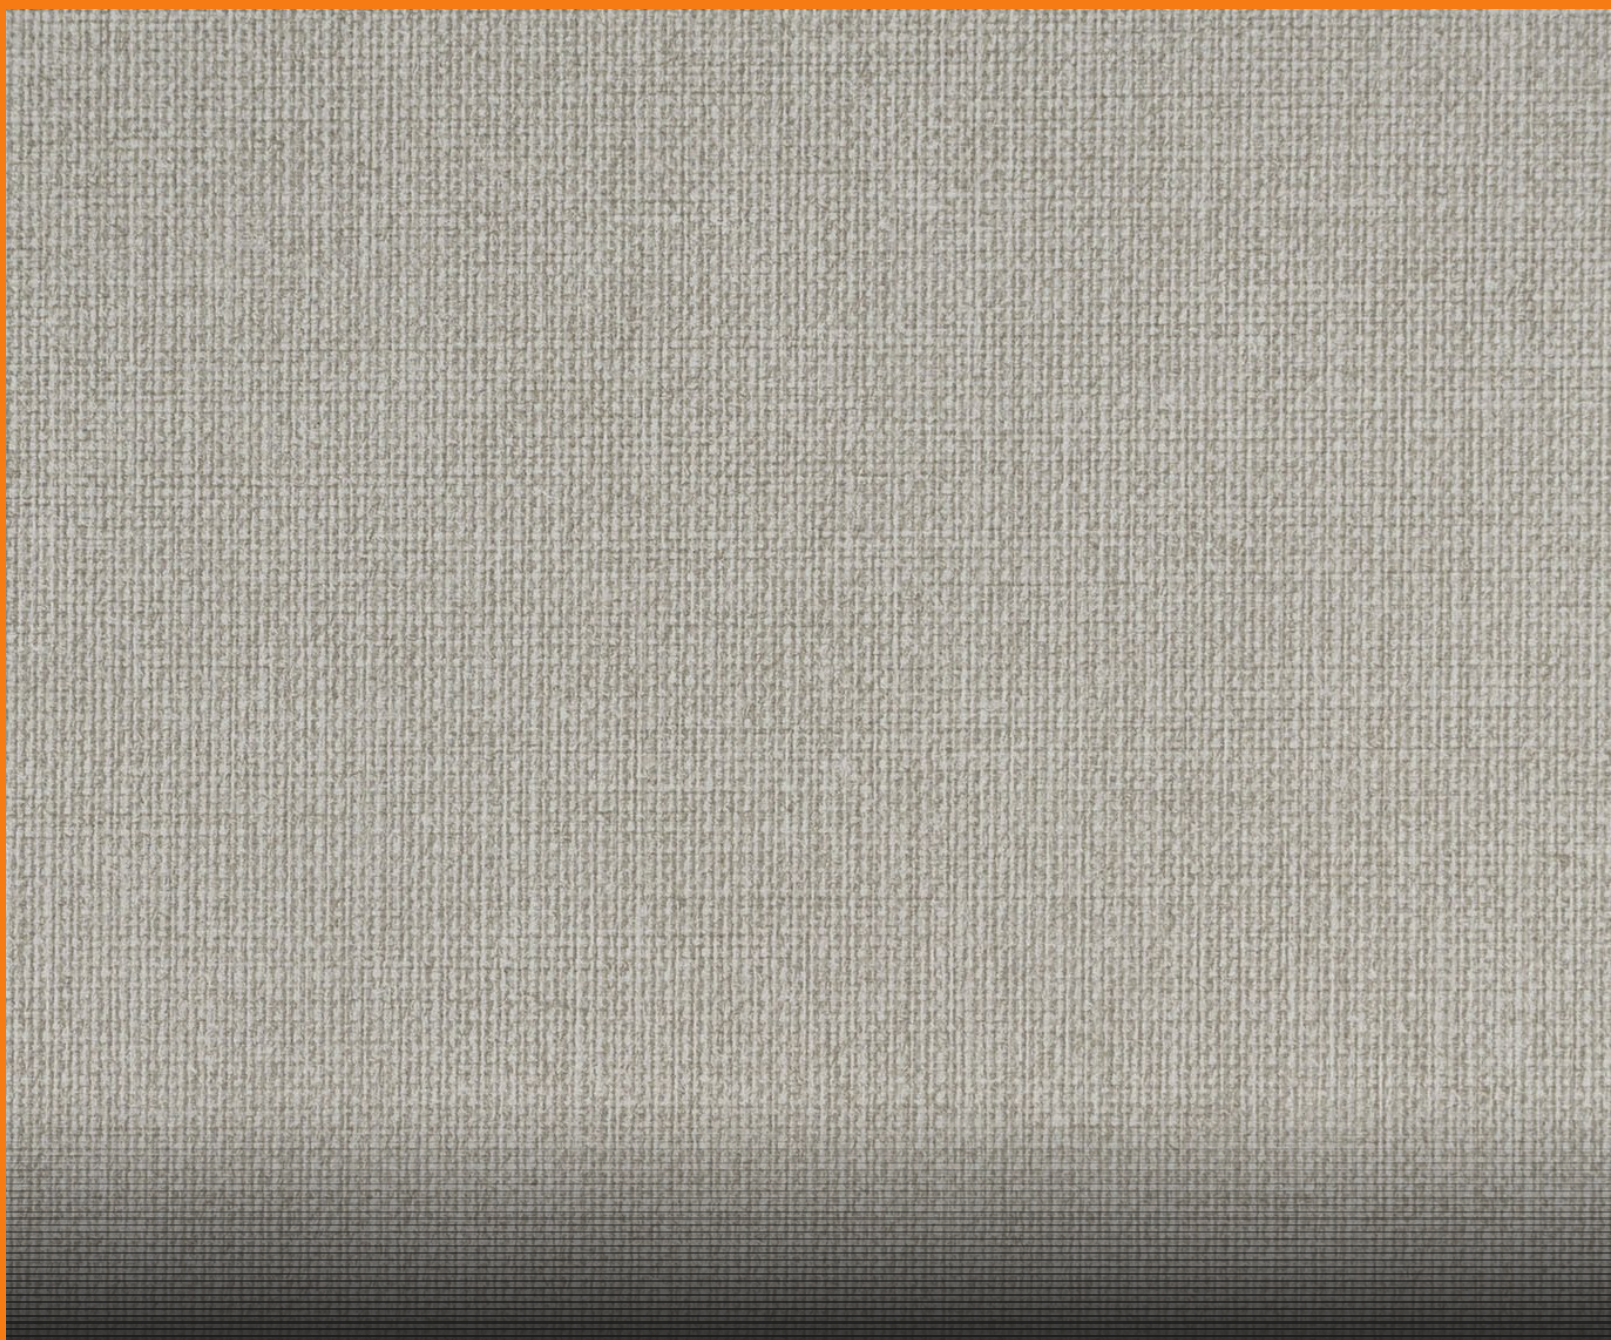


PATTERN · TYPE II VINYL · 13 COLORWAYS

MERIDIAN

Kinetic's coordinating texture, Meridian, is the perfect backdrop for any interior. A stylish but simplistic weave, Meridian comes in a variety of colors that will accent all types of decor and furnishings within the room. Sample Cosmos or Star Dust for an effective neutral; or Kindle and Reflection for a bolder take.

Type II 20 oz | 100% Vinyl | Osnaburg backing | 52/54" | Random Match · Reversible | Class A ASTM E84

Rich Friedman · Everything Hospitality · 732-343-4266 · rich@everythinghospitality.com · everythinghospitality.com

MERIDIAN · Specifications

Coordinating weave texture · Commercial Type II vinyl wallcovering

PHYSICAL PROPERTIES


WEIGHT	**Type II 20 oz**
CONTENT	**100% Vinyl**
BACKING	**Osnaburg**
WIDTH	**52/54"**
REPEAT	**Random Match, Reversible**
ORIGIN	**Manufactured in the USA**
DECLARATIONS	**HPD Compliant · EPD Compliant**

PERFORMANCE

- Fire Rating: Class A, ASTM E84
- Europe CE Fire Tested
- CAN/ULC S102 Fire Tested
- Color Fastness UK Test Result: BS2782 — Pass
- Meets Federal Specification CCC-W-408D for scrubbability, washability, and stain resistance
- IMO certification available upon request (flame spread, smoke, and toxicity)

Sustainability

- Low emitting — passes Cal 01350 Standard (LEED EQ 4.2)
- NSF/ANSI 342 certified for responsible manufacturing and sustainable performance
- Product contains up to 40% recycled content
- Free of conflict minerals, heavy metals, solvents, phthalates (BBP, DBP, DEHP, DIDP, DnHP, DnOP), and PFC/PFOA
- Printed with solvent-free inks
- CE Declaration of Conformity
- HPD Compliant and EPD Compliant
- Contributes to LEED credits for commercial and residential projects
- Crafted with low-emitting materials to support healthier indoor air

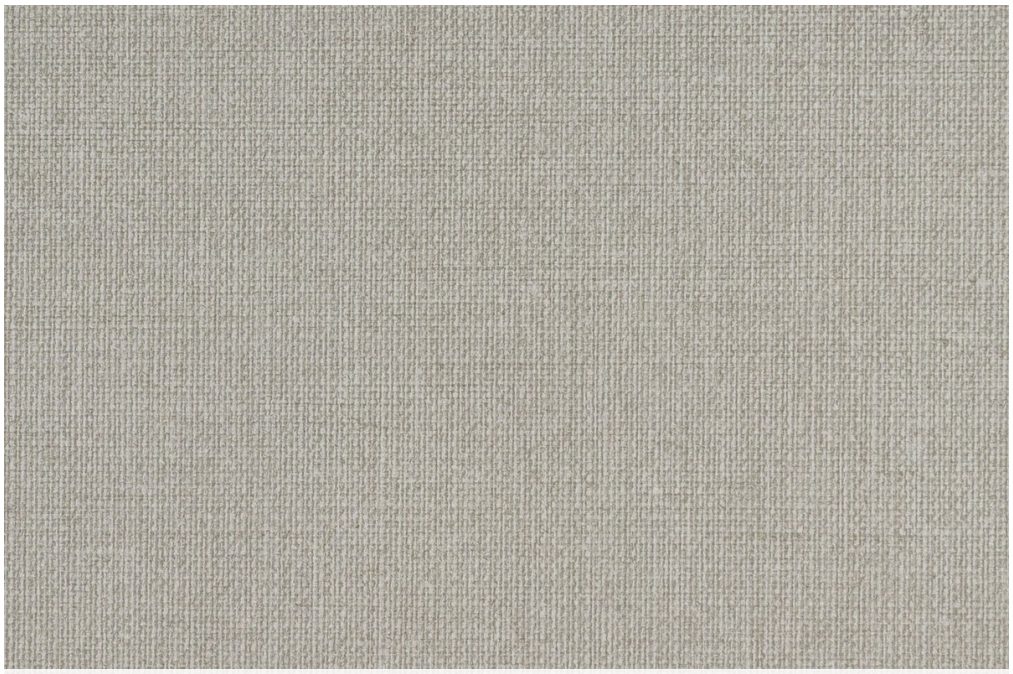

Meridian — installed look

SAMPLES & PROJECT QUOTES

Rich Friedman

Everything Hospitality

732-343-4266

rich@everythinghospitality.com

everythinghospitality.com

SPECIFICATION NOTE

All wall surfacing materials, including wallcoverings, should be selected with the building in mind. Buildings with liquid or vapor moisture infiltration — or conditions that make it likely — are at risk for mold growth. Consult a professional about the benefits and limitations of wallcovering in those settings. Textural patterns are designed to simulate natural materials; variation in color, texture, and shading is part of the manufacturing process and adds to the richness of the product.

MERIDIAN · Colorways

EVERYTHING HOSPITALITY

13 colorways · SKUs MC186-3290 through MC186-3302



Over the Moon
MC186-3290



Illumination
MC186-3291



Interstellar
MC186-3292



Star Dust
MC186-3293




Subatomic
MC186-3294



Cosmos
MC186-3295



Spark
MC186-3296

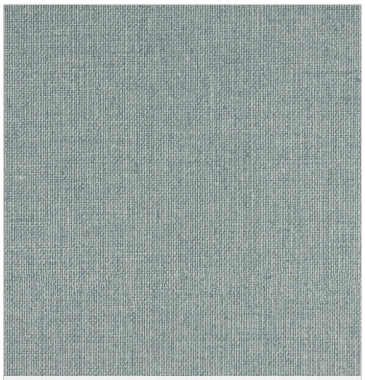


Reflection
MC186-3297



Filament
MC186-3298



Ion Grey
MC186-3299

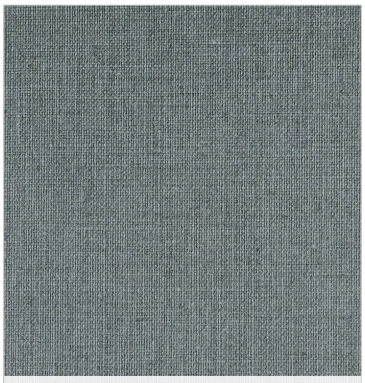

Quantum Field
MC186-3300



Kindle
MC186-3301



Celestial Blue
MC186-3302

SAMPLES & PROJECT QUOTES

Rich Friedman

Everything Hospitality

732-343-4266

rich@everythinghospitality.com

everythinghospitality.com

EVERYTHING HOSPITALITY

MERIDIAN · Installation

Read in full before hanging · Deviations may void later claims

STOP AND READ BEFORE INSTALLING

STOP if any discrepancy is discovered during installation and contact Everything Hospitality before proceeding. Examine all material for correct pattern, color, quantity, and matching lot numbers. Install vinyl wallcovering only under permanent lighting. Maintain 60–80°F and 50% relative humidity or less for at least six days before and after installation.

Surface Preparation

- All surfaces must be smooth, clean, dry, and structurally sound. Newly plastered walls should have minimal lime or alkali and less than 4% residual moisture (confirm with a moisture meter).
- Prime new drywall/plaster with a high-quality, adhesion-promoting acrylic or latex wallcovering primer. If moisture is present, apply an oil-based primer first as a barrier, then acrylic or latex over it. Do not hang vinyl directly on oil-based primer.
- Perform an adhesion test to confirm primer and adhesive compatibility. Allow at least 14 days before removing test strips.
- Existing walls: sand glossy surfaces, repair irregularities, and prime. Score a shallow “X” and apply masking tape — if paint peels, it must be removed. Hold a wet sponge 15–20 seconds; if color transfers, remove the paint.
- Completely remove old wallcovering and residual adhesive. Rinse, dry, and prime as above. For surfaces other than drywall/plaster, consult Everything Hospitality for special preparation.

Application

- Install rolls in numerical sequence, starting with roll #1. Number and hang each strip in order.
- For random match patterns, reverse hang every other strip. After three strips, inspect for pattern acceptability. If unsatisfactory, re-hang strip #2 without reversing. Do not continue until approved. Claims beyond three strips will not be accepted.
- Seams may be table trimmed or double-cut on the wall for random match patterns; do not score the drywall. Matched patterns may require table trimming.
- Apply undiluted adhesive to the fabric backing with a pasting machine or short-nap roller. Use a quality pre-mixed adhesive suited to the wallcovering weight. Book per adhesive manufacturer recommendations. Keep adhesive at 65–78°F.
- Hang each strip and smooth with a smoothing brush. Do not skip areas above doors or around windows. Stagger vertical seams at least six inches from corners. Use a heat gun for rounding corners only after testing the finish. Clean excess adhesive from seams immediately.

WARRANTY

Vinyl wallcovering is guaranteed to be free of defects in workmanship and materials for one year. Claims are not honored if these instructions are not followed. Labor and associated costs beyond replacement material are not covered. Represented by Everything Hospitality — Rich Friedman, 732-343-4266, rich@everythinghospitality.com, everythinghospitality.com.



Meridian — installed look