

Commercial Wallcoverings Lookbook

Contract wallcovering · Direct-source pricing · Samples · Project quotes




Aria

5 colorways



Ascend Stripe

9 colorways

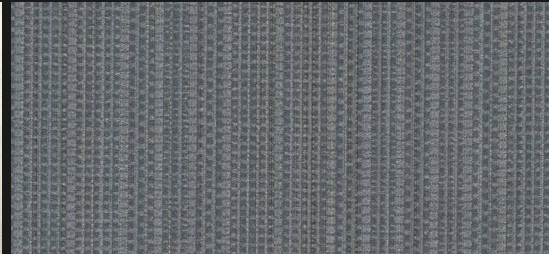

Avenza

3 colorways



Bet Din

5 colorways



Burmese

9 colorways



Envera

5 colorways



Feline

7 colorways



Kinetic

13 colorways



Meridian

13 colorways



Otahiete

5 colorways



Serpent

7 colorways



Zaya

16 colorways

Rich Friedman

732-343-4266 · rich@everythinghospitality.com

everythinghospitality.com

Everything Hospitality
Commercial Wallcovering




Aria p. 3
5 colorways



Ascend Stripe pp. 4–7
9 colorways



Avenza p. 8
3 colorways

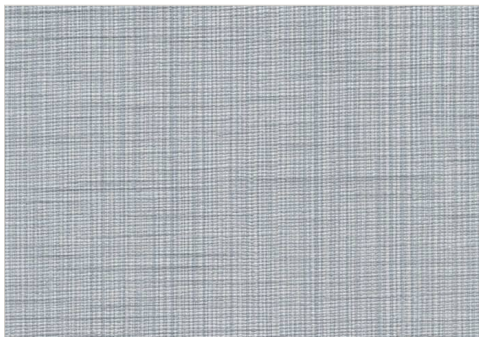

Bet Din p. 9
5 colorways



Burmese pp. 10–13
9 colorways



Envera p. 14
5 colorways



Feline pp. 15–18
7 colorways



Kinetic pp. 19–22
13 colorways




Meridian pp. 23–26
13 colorways



Otahiete p. 27
5 colorways



Serpent pp. 28–31
7 colorways

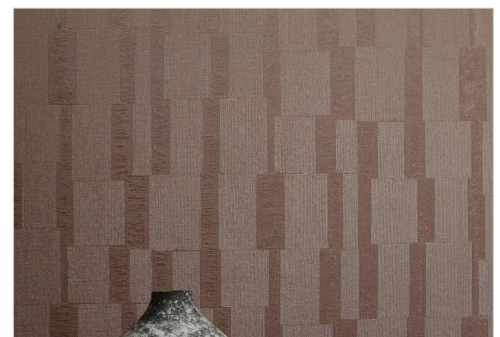

Zaya pp. 32–35
16 colorways

PATTERN · TYPE II VINYL · 5 COLORWAYS

ARIA All Colorways

Type II 20 oz · 52/54" · Random Match · 100% Vinyl / Osnaburg

PERFORMANCE

- Fire Rating: Class A, ASTM E84
- Europe CE Fire Tested
- Meets W-101 WA Quality Standard
- Meets CCC-W-408D scrub / wash / stain

SUSTAINABILITY

- Low-emitting — Cal 01350 (LEED EQ 4.2)
- Up to 40% recycled content
- No conflict minerals, heavy metals, solvents, phthalates
- PFC/PFOA-free · Solvent-free inks
- Made in USA

Available Colorways

Samples and project quotes: 732-343-4266



Blue
YFC-4208




Dark Grey
YFC-4209



Grey
YFC-4210



Bone
YFC-4211

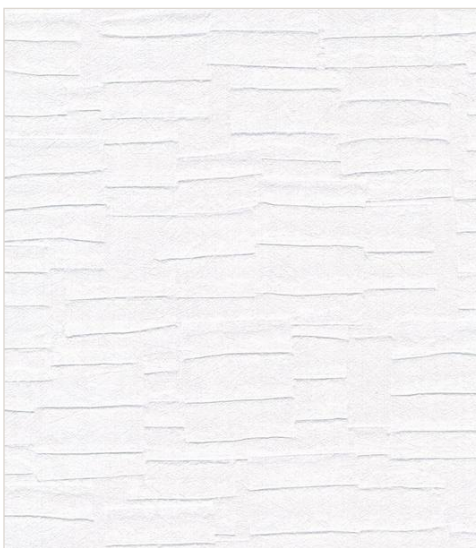

White
YFC-4212

SAMPLES & PROJECT QUOTES

Rich Friedman

Everything Hospitality

732-343-4266

rich@everythinghospitality.com

everythinghospitality.com

PATTERN · TYPE II VINYL · 9 COLORWAYS

ASCEND STRIPE

In need of a stylish and alluring wallcovering? Look no further. A valiant design, Ascend Stripe, takes three contrasting tones and sets them together, creating beautiful bands of color. This pattern is sure to liven up your space while being both captivating and calming — from a quiet muted palette to one that makes a statement.

Type II 20 oz

100% Vinyl

Non-Woven backing

52/54"

Random Match

Class A ASTM E84

ASCEND STRIPE · Colorways

9 colorways · SKUs MC188-3314 through MC188-3322



Daybreak
MC188-3314



Mystic Cloud
MC188-3315



Versatile
MC188-3316



Dark Haven
MC188-3317




High Rollers
MC188-3318



Pure Sky
MC188-3319



Laguna
MC188-3320

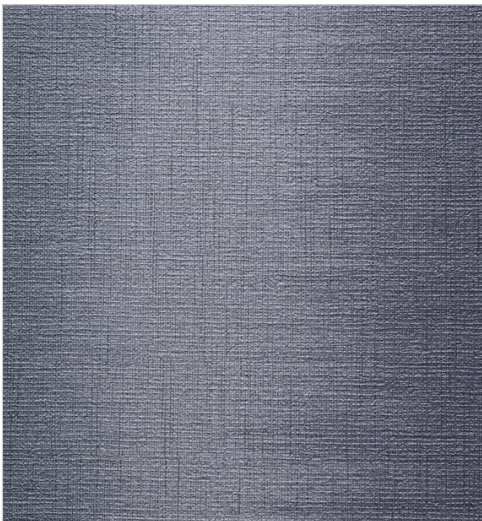

Levi
MC188-3321



Midnight Moon
MC188-3322

ASCEND STRIPE · Specifications

Three-tone banded stripe · Commercial Type II vinyl wallcovering

PHYSICAL PROPERTIES

WEIGHT	Type II 20 oz
CONTENT	100% Vinyl
BACKING	Non-Woven
WIDTH	52/54"
REPEAT	Random Match
ORIGIN	Manufactured in the USA
DECLARATIONS	HPD Compliant · EPD Compliant

PERFORMANCE

- Fire Rating: Class A, ASTM E84
- Europe CE Fire Tested
- CAN/ULC S102 Fire Tested
- Color Fastness UK Test Result: BS2782 — Pass
- Meets Federal Specification CCC-W-408D for scrubbability, washability, and stain resistance
- IMO certification available upon request (flame spread, smoke, and toxicity)

Sustainability

- Low emitting — passes Cal 01350 Standard (LEED EQ 4.2)
- NSF/ANSI 342 certified for responsible manufacturing and sustainable performance
- Product contains up to 40% recycled content
- Free of conflict minerals, heavy metals, solvents, phthalates (BBP, DBP, DEHP, DIDP, DnHP, DnOP), and PFC/PFOA
- Printed with solvent-free inks
- CE Declaration of Conformity
- HPD Compliant and EPD Compliant
- Contributes to LEED credits for commercial and residential projects
- Crafted with low-emitting materials to support healthier indoor air

Colorways at a glance

9 colorways — full-size swatches on the colorways page



SPECIFICATION NOTE

All wall surfacing materials, including wallcoverings, should be selected with the building in mind. Buildings with liquid or vapor moisture infiltration — or conditions that make it likely — are at risk for mold growth. Consult a professional about the benefits and limitations of wallcovering in those settings. Textural patterns are designed to simulate natural materials; variation in color, texture, and shading is part of the manufacturing process and adds to the richness of the product.

ASCEND STRIPE · Installation

Read in full before hanging · Deviations may void later claims

STOP AND READ BEFORE INSTALLING

STOP if any discrepancy is discovered during installation and contact Everything Hospitality before proceeding. Examine all material for correct pattern, color, quantity, and matching lot numbers. Install vinyl wallcovering only under permanent lighting. Maintain 60–80°F and 50% relative humidity or less for at least six days before and after installation.

Surface Preparation


- All surfaces must be smooth, clean, dry, and structurally sound. Newly plastered walls should have minimal lime or alkali and less than 4% residual moisture (confirm with a moisture meter).
- Prime new drywall/plaster with a high-quality, adhesion-promoting acrylic or latex wallcovering primer. If moisture is present, apply an oil-based primer first as a barrier, then acrylic or latex over it. Do not hang vinyl directly on oil-based primer.
- Perform an adhesion test to confirm primer and adhesive compatibility. Allow at least 14 days before removing test strips.
- Existing walls: sand glossy surfaces, repair irregularities, and prime. Score a shallow “X” and apply masking tape — if paint peels, it must be removed. Hold a wet sponge 15–20 seconds; if color transfers, remove the paint.
- Completely remove old wallcovering and residual adhesive. Rinse, dry, and prime as above. For surfaces other than drywall/plaster, consult Everything Hospitality for special preparation.

Application

- Install rolls in numerical sequence, starting with roll #1. Number and hang each strip in order.
- For random match patterns, reverse hang every other strip. After three strips, inspect for pattern acceptability. If unsatisfactory, re-hang strip #2 without reversing. Do not continue until approved. Claims beyond three strips will not be accepted.
- Seams may be table trimmed or double-cut on the wall for random match patterns; do not score the drywall. Matched patterns may require table trimming.
- Apply undiluted adhesive to the fabric backing with a pasting machine or short-nap roller. Use a quality pre-mixed adhesive suited to the wallcovering weight. Book per adhesive manufacturer recommendations. Keep adhesive at 65–78°F.
- Hang each strip and smooth with a smoothing brush. Do not skip areas above doors or around windows. Stagger vertical seams at least six inches from corners. Use a heat gun for rounding corners only after testing the finish. Clean excess adhesive from seams immediately.

WARRANTY

Vinyl wallcovering is guaranteed to be free of defects in workmanship and materials for one year. Claims are not honored if these instructions are not followed. Labor and associated costs beyond replacement material are not covered. Represented by Everything Hospitality — Rich Friedman, 732-343-4266, rich@everythinghospitality.com, everythinghospitality.com.

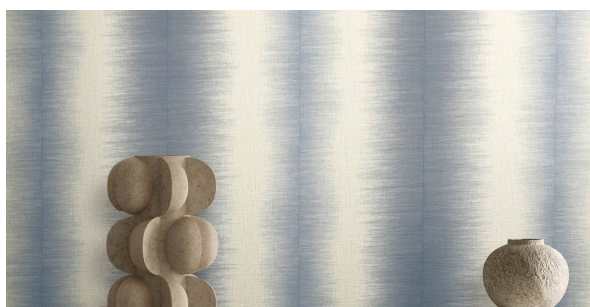

Ascend Stripe — installed look



Daybreak



Mystic Cloud



Versatile



Dark Haven



High Rollers



Pure Sky




Laguna



Levi



Midnight Moon



Samples:
732-343-4266

PATTERN · TYPE II VINYL · 3 COLORWAYS

AVENZA All Colorways

Type II 20 oz · 52/54" · Random Match · 100% Vinyl / Osnaburg

PERFORMANCE

- Fire Rating: Class A, ASTM E84
- Europe CE Fire Tested
- Meets W-101 WA Quality Standard
- Meets CCC-W-408D scrub / wash / stain

SUSTAINABILITY

- Low-emitting — Cal 01350 (LEED EQ 4.2)
- Up to 40% recycled content
- No conflict minerals, heavy metals, solvents, phthalates
- PFC/PFOA-free · Solvent-free inks

Available Colorways

Samples and project quotes: 732-343-4266



Pewter
YFC-4202



Black
YFC-4201



Taupe
YFC-4203

EVERYTHING HOSPITALITY · SAMPLES & PROJECT QUOTES

Rich Friedman · Everything Hospitality · 732-343-4266 · rich@everythinghospitality.com · everythinghospitality.com

PATTERN · TYPE II VINYL · 5 COLORWAYS

BET DIN

All Colorways

Type II 20 oz · 52/54" · Random Match · 100% Vinyl / Osnaburg

PERFORMANCE


- Fire Rating: Class A, ASTM E84
- Europe CE Fire Tested
- Meets W-101 WA Quality Standard
- Meets CCC-W-408D scrub / wash / stain

SUSTAINABILITY

- Low-emitting — Cal 01350 (LEED EQ 4.2)
- Up to 40% recycled content
- No conflict minerals, heavy metals, solvents, phthalates
- PFC/PFOA-free · Solvent-free inks

Available Colorways

Samples and project quotes: 732-343-4266

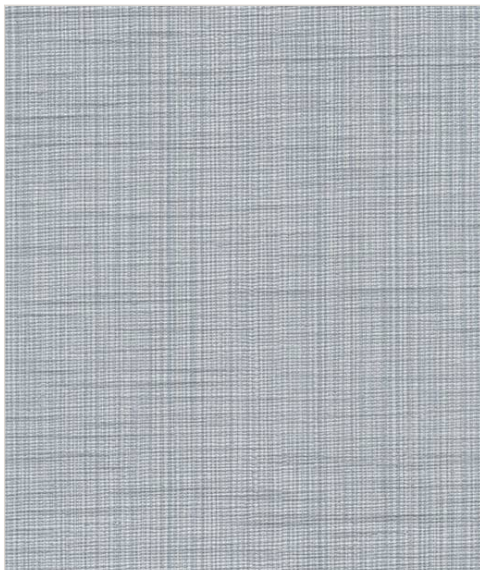


Sea

YFC-4238




Cream

YFC-4239

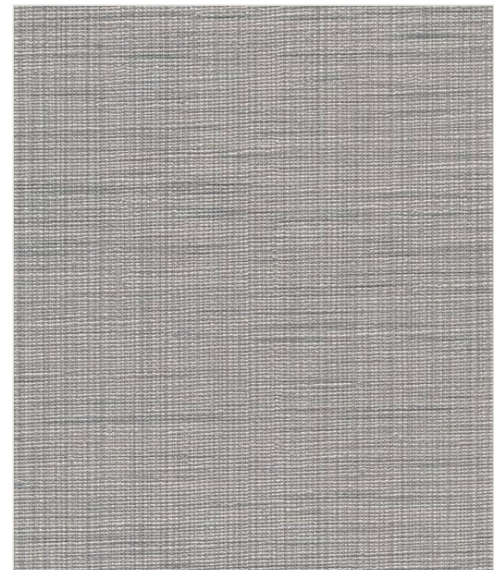

Fog

YFC-4237

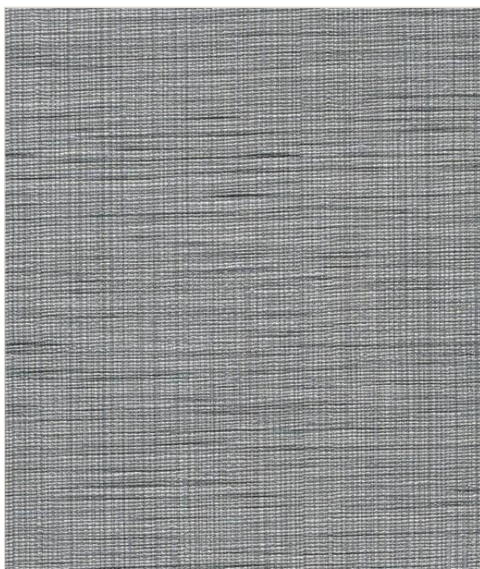

Shimmer

YFC-4236



Snow

YFC-4240

SAMPLES & PROJECT QUOTES

Rich Friedman

Everything Hospitality

732-343-4266

rich@everythinghospitality.com

everythinghospitality.com

PATTERN · TYPE II VINYL · 9 COLORWAYS

BURMESE

Burmese brings a glamorous animal-print motif to commercial walls — a cultivated classic with an interesting twist. High-fashion colorways and finishes add real wow factor; Winter and Platinum are particularly decorative, with Snow, Sand, Greige, Steel, Komodo, Caribe, and Ingot completing the palette.

Type II 20 oz

100% Vinyl

Osnaburg backing

52/54"

Random Match · Reversible


Class A ASTM E84

BURMESE · Colorways


9 colorways · SKUs MC141-2728 through MC141-2736



Platinum
MC141-2728

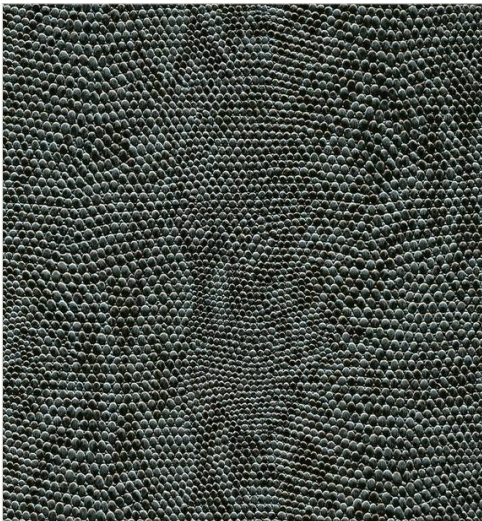

Ingot
MC141-2729

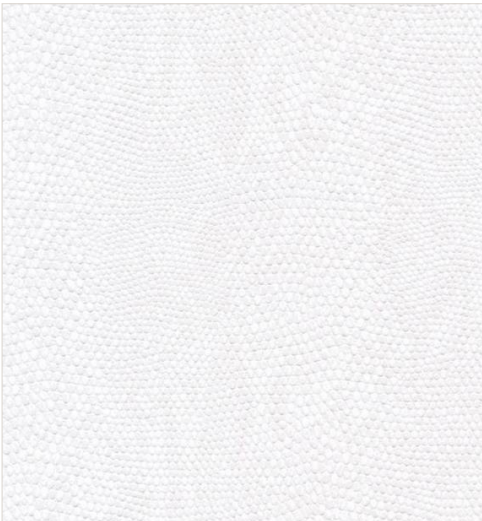


Snow
MC141-2730




Winter
MC141-2731




Sand
MC141-2732

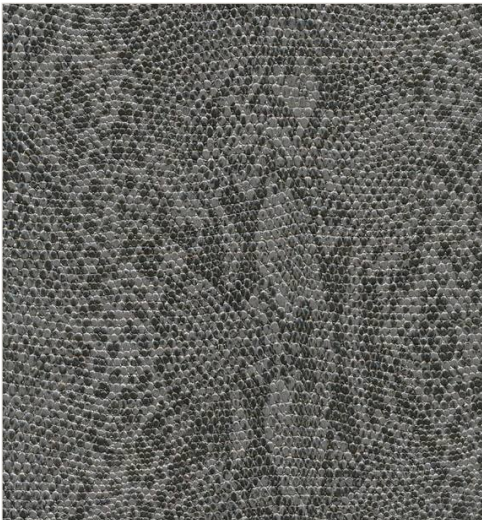


Greige
MC141-2733

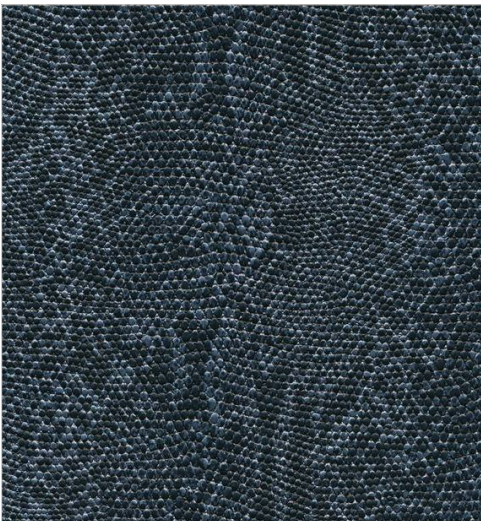

Steel
MC141-2734

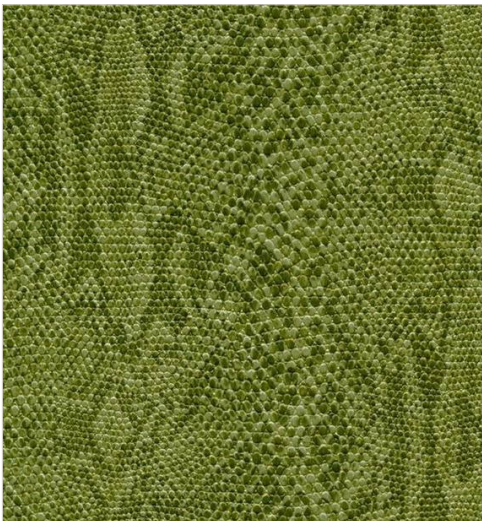

Komodo
MC141-2735

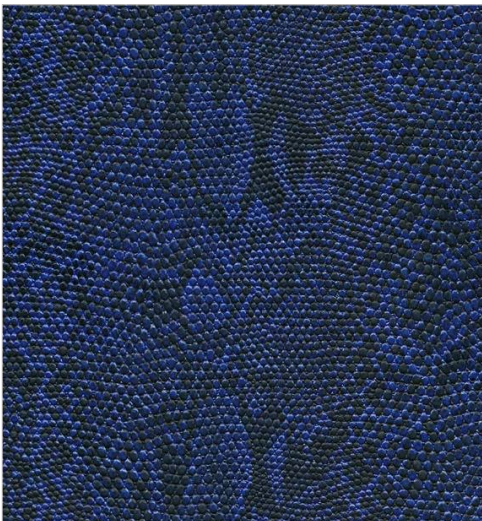

Caribe
MC141-2736

BURMESE · Specifications

Fashion animal print · Commercial Type II vinyl wallcovering

PHYSICAL PROPERTIES

WEIGHT	Type II 20 oz
CONTENT	100% Vinyl
BACKING	Osnaburg
WIDTH	52/54"
REPEAT	Random Match, Reversible
ORIGIN	Manufactured in the USA
DECLARATIONS	HPD Compliant · EPD Compliant

PERFORMANCE

- Fire Rating: Class A, ASTM E84
- Europe CE Fire Tested
- CAN/ULC S102 Fire Tested
- Color Fastness UK Test Result: BS2782 — Pass
- Meets Federal Specification CCC-W-408D for scrubbability, washability, and stain resistance
- IMO certification available upon request (flame spread, smoke, and toxicity)

Sustainability

- Low emitting — passes Cal 01350 Standard (LEED EQ 4.2)
- NSF/ANSI 342 certified for responsible manufacturing and sustainable performance
- Product contains up to 40% recycled content
- Free of conflict minerals, heavy metals, solvents, phthalates (BBP, DBP, DEHP, DIDP, DnHP, DnOP), and PFC/PFOA
- Printed with solvent-free inks
- CE Declaration of Conformity
- HPD Compliant and EPD Compliant
- Contributes to LEED credits for commercial and residential projects
- Crafted with low-emitting materials to support healthier indoor air

Colorways at a glance

9 colorways — full-size swatches on the colorways page



SPECIFICATION NOTE

All wall surfacing materials, including wallcoverings, should be selected with the building in mind. Buildings with liquid or vapor moisture infiltration — or conditions that make it likely — are at risk for mold growth. Consult a professional about the benefits and limitations of wallcovering in those settings. Textural patterns are designed to simulate natural materials; variation in color, texture, and shading is part of the manufacturing process and adds to the richness of the product.

BURMESE · Installation

Read in full before hanging · Deviations may void later claims

STOP AND READ BEFORE INSTALLING

STOP if any discrepancy is discovered during installation and contact Everything Hospitality before proceeding. Examine all material for correct pattern, color, quantity, and matching lot numbers. Install vinyl wallcovering only under permanent lighting. Maintain 60–80°F and 50% relative humidity or less for at least six days before and after installation.

Surface Preparation


- All surfaces must be smooth, clean, dry, and structurally sound. Newly plastered walls should have minimal lime or alkali and less than 4% residual moisture (confirm with a moisture meter).
- Prime new drywall/plaster with a high-quality, adhesion-promoting acrylic or latex wallcovering primer. If moisture is present, apply an oil-based primer first as a barrier, then acrylic or latex over it. Do not hang vinyl directly on oil-based primer.
- Perform an adhesion test to confirm primer and adhesive compatibility. Allow at least 14 days before removing test strips.
- Existing walls: sand glossy surfaces, repair irregularities, and prime. Score a shallow “X” and apply masking tape — if paint peels, it must be removed. Hold a wet sponge 15–20 seconds; if color transfers, remove the paint.
- Completely remove old wallcovering and residual adhesive. Rinse, dry, and prime as above. For surfaces other than drywall/plaster, consult Everything Hospitality for special preparation.

Application


- Install rolls in numerical sequence, starting with roll #1. Number and hang each strip in order.
- For random match patterns, reverse hang every other strip. After three strips, inspect for pattern acceptability. If unsatisfactory, re-hang strip #2 without reversing. Do not continue until approved. Claims beyond three strips will not be accepted.
- Seams may be table trimmed or double-cut on the wall for random match patterns; do not score the drywall. Matched patterns may require table trimming.
- Apply undiluted adhesive to the fabric backing with a pasting machine or short-nap roller. Use a quality pre-mixed adhesive suited to the wallcovering weight. Book per adhesive manufacturer recommendations. Keep adhesive at 65–78°F.
- Hang each strip and smooth with a smoothing brush. Do not skip areas above doors or around windows. Stagger vertical seams at least six inches from corners. Use a heat gun for rounding corners only after testing the finish. Clean excess adhesive from seams immediately.

WARRANTY

Vinyl wallcovering is guaranteed to be free of defects in workmanship and materials for one year. Claims are not honored if these instructions are not followed. Labor and associated costs beyond replacement material are not covered. Represented by Everything Hospitality — Rich Friedman, 732-343-4266, rich@everythinghospitality.com, everythinghospitality.com.

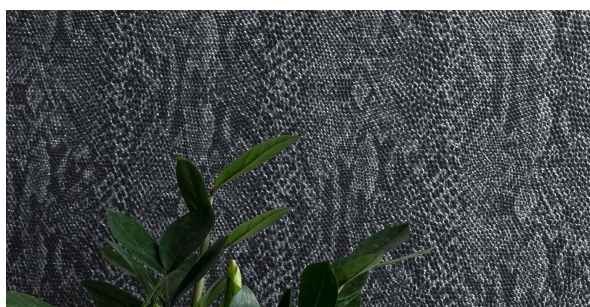


Burmese — installed look



Platinum




Ingot



Snow



Winter



Sand



Greige



Steel



Komodo



Caribe

Samples:
732-343-4266

PATTERN · TYPE II VINYL · 5 COLORWAYS

ENVERA All Colorways

Type II 20 oz · 52/54" · Random Match · 100% Vinyl / Osnaburg

PERFORMANCE

- Fire Rating: Class A, ASTM E84
- Europe CE Fire Tested
- Meets W-101 WA Quality Standard
- Meets CCC-W-408D scrub / wash / stain

SUSTAINABILITY

- Low-emitting — Cal 01350 (LEED EQ 4.2)
- Up to 40% recycled content
- No conflict minerals, heavy metals, solvents, phthalates
- PFC/PFOA-free · Solvent-free inks

Available Colorways

Samples and project quotes: 732-343-4266



Mocha
YFC-4213



Ash
YFC-4217



Desert Sand
YFC-4214



Sand
YFC-4216



Taupe
YFC-4215

SAMPLES & PROJECT QUOTES


Rich Friedman

Everything Hospitality

732-343-4266

rich@everythinghospitality.com

everythinghospitality.com

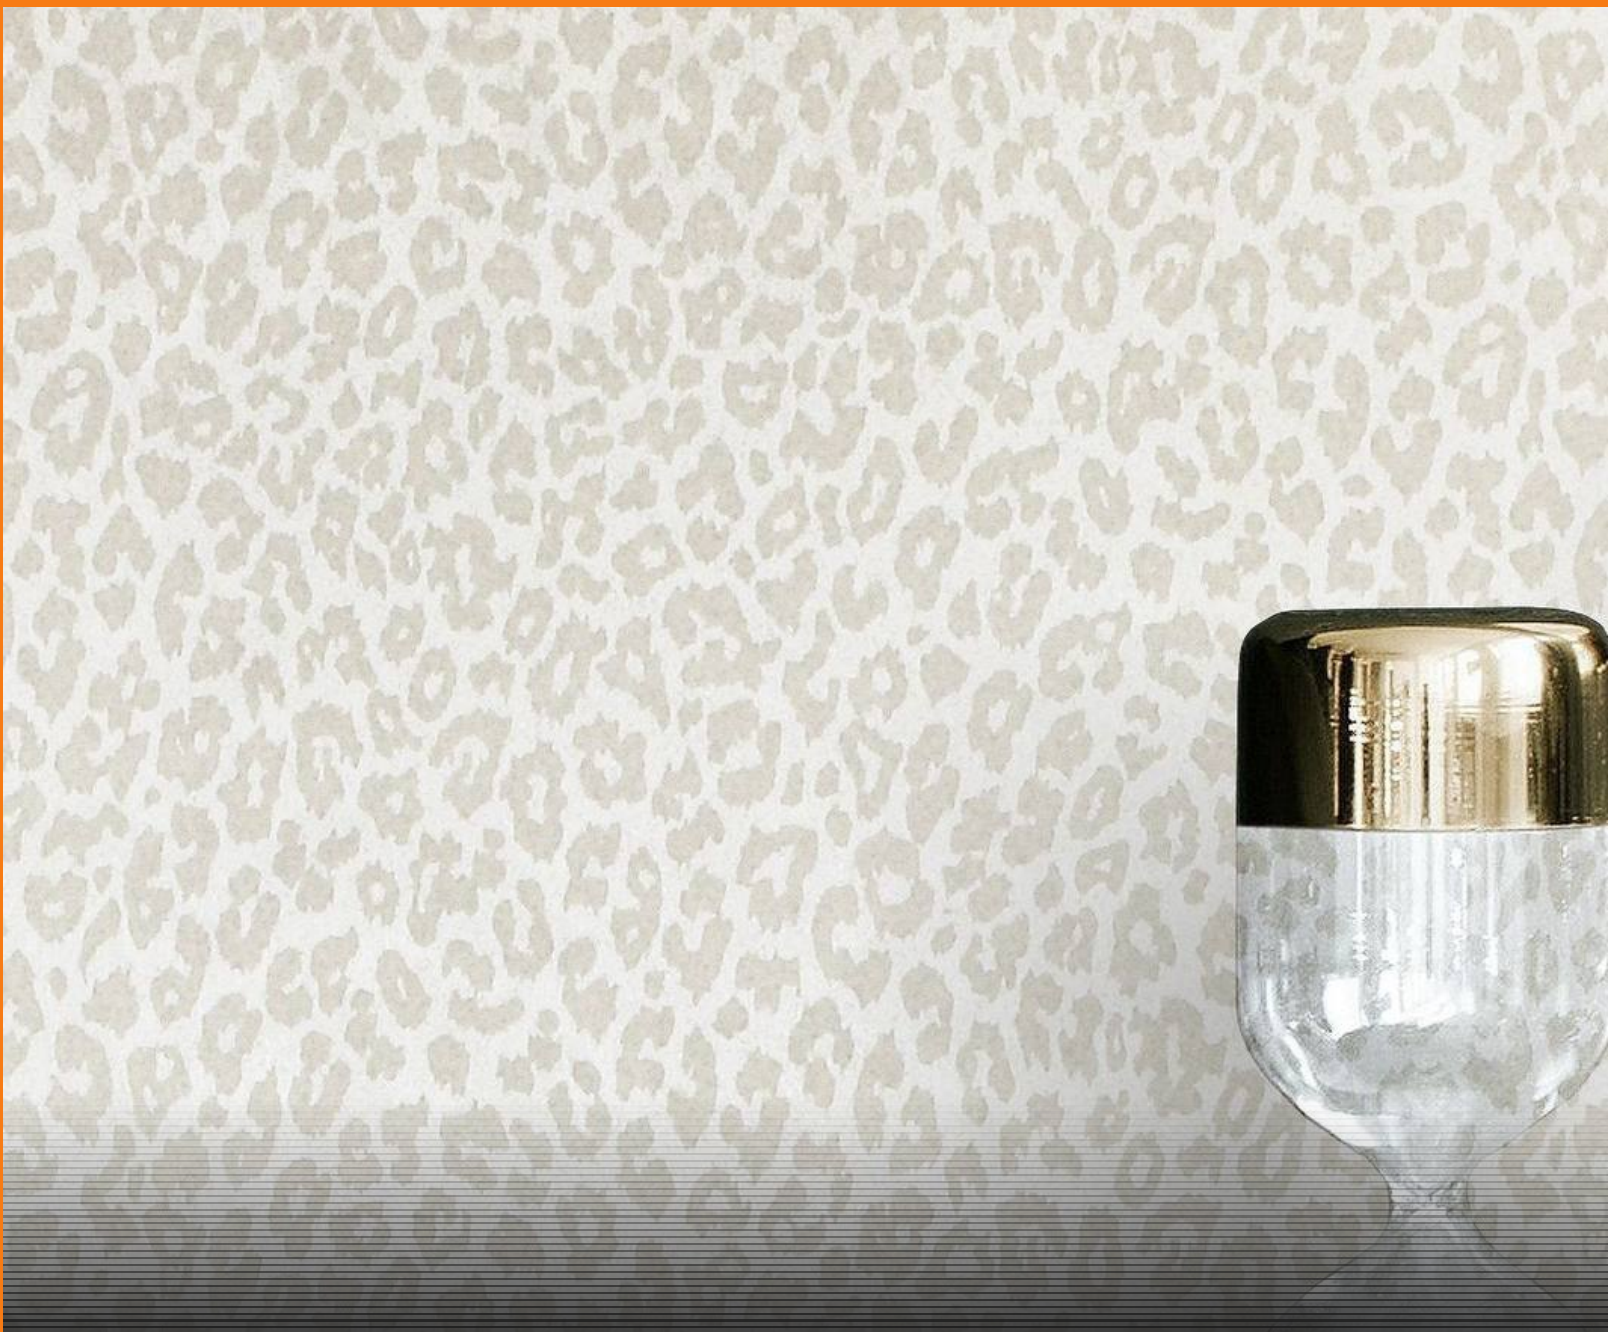

PATTERN · TYPE II VINYL · 7 COLORWAYS

FELINE

Feline is a timeless animal-print classic with a cultivated, high-fashion twist. Glamorous finishes and a refined palette deliver decorative impact in hospitality and commercial interiors — Platinum is especially alluring, with Sand, Greige, Steel, Komodo, and Caribe rounding out the range.

Type II 20 oz

100% Vinyl

Osnaburg backing

52/54"

Random Match · Reversible

Class A ASTM E84

FELINE · Colorways


7 colorways · SKUs MC143-2744 through MC143-2750



Platinum
MC143-2744




Snow
MC143-2745

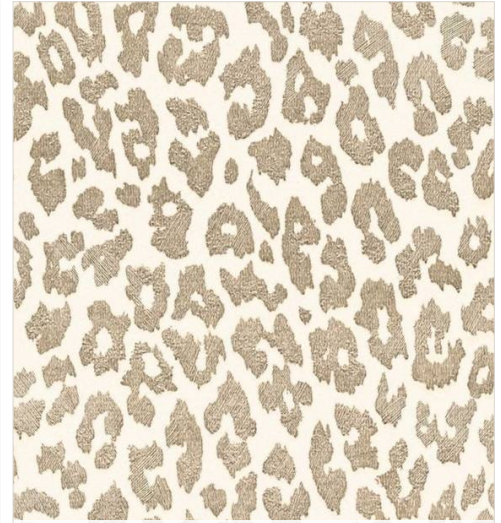


Sand
MC143-2746




Greige
MC143-2747

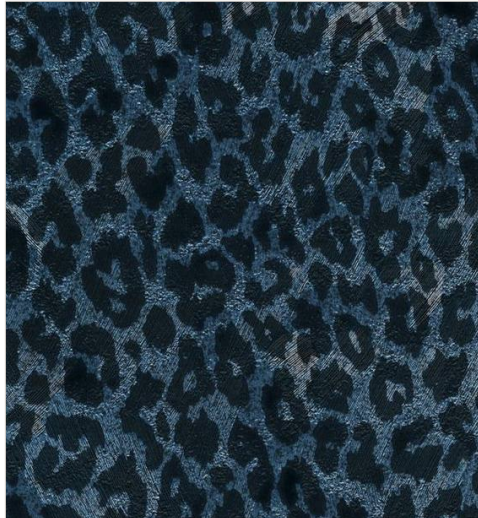

Steel
MC143-2748

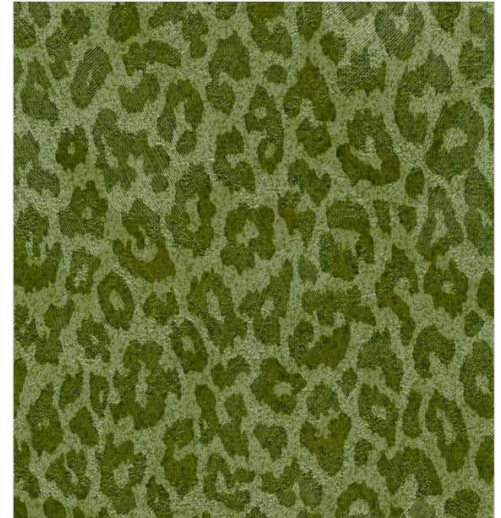

Komodo
MC143-2749

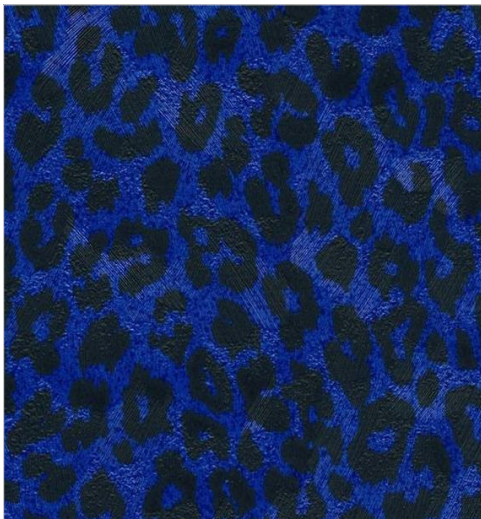

Caribe
MC143-2750

SAMPLES & PROJECT QUOTES

Rich Friedman

Everything Hospitality

732-343-4266

rich@everythinghospitality.com

everythinghospitality.com

FELINE · Specifications

High-fashion animal print · Commercial Type II vinyl wallcovering

PHYSICAL PROPERTIES

WEIGHT	Type II 20 oz
CONTENT	100% Vinyl
BACKING	Osnaburg
WIDTH	52/54"
REPEAT	Random Match, Reversible
ORIGIN	Manufactured in the USA
DECLARATIONS	HPD Compliant · EPD Compliant

PERFORMANCE

- Fire Rating: Class A, ASTM E84
- Europe CE Fire Tested
- CAN/ULC S102 Fire Tested
- Color Fastness UK Test Result: BS2782 — Pass
- Meets Federal Specification CCC-W-408D for scrubbability, washability, and stain resistance
- IMO certification available upon request (flame spread, smoke, and toxicity)

Sustainability

- Low emitting — passes Cal 01350 Standard (LEED EQ 4.2)
- NSF/ANSI 342 certified for responsible manufacturing and sustainable performance
- Product contains up to 40% recycled content
- Free of conflict minerals, heavy metals, solvents, phthalates (BBP, DBP, DEHP, DIDP, DnHP, DnOP), and PFC/PFOA
- Printed with solvent-free inks
- CE Declaration of Conformity
- HPD Compliant and EPD Compliant
- Contributes to LEED credits for commercial and residential projects
- Crafted with low-emitting materials to support healthier indoor air

Colorways at a glance


7 colorways — full-size swatches on the colorways page



Platinum



Snow

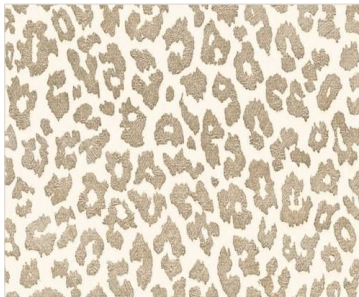

Sand



Greige



Steel



Komodo



Caribe

SAMPLES & QUOTES

732-343-4266

rich@everythinghospitality.com
everythinghospitality.com

SPECIFICATION NOTE

All wall surfacing materials, including wallcoverings, should be selected with the building in mind. Buildings with liquid or vapor moisture infiltration — or conditions that make it likely — are at risk for mold growth. Consult a professional about the benefits and limitations of wallcovering in those settings. Textural patterns are designed to simulate natural materials; variation in color, texture, and shading is part of the manufacturing process and adds to the richness of the product.

Read in full before hanging · Deviations may void later claims

STOP AND READ BEFORE INSTALLING

STOP if any discrepancy is discovered during installation and contact Everything Hospitality before proceeding. Examine all material for correct pattern, color, quantity, and matching lot numbers. Install vinyl wallcovering only under permanent lighting. Maintain 60–80°F and 50% relative humidity or less for at least six days before and after installation.

Surface Preparation


- All surfaces must be smooth, clean, dry, and structurally sound. Newly plastered walls should have minimal lime or alkali and less than 4% residual moisture (confirm with a moisture meter).
- Prime new drywall/plaster with a high-quality, adhesion-promoting acrylic or latex wallcovering primer. If moisture is present, apply an oil-based primer first as a barrier, then acrylic or latex over it. Do not hang vinyl directly on oil-based primer.
- Perform an adhesion test to confirm primer and adhesive compatibility. Allow at least 14 days before removing test strips.
- Existing walls: sand glossy surfaces, repair irregularities, and prime. Score a shallow “X” and apply masking tape — if paint peels, it must be removed. Hold a wet sponge 15–20 seconds; if color transfers, remove the paint.
- Completely remove old wallcovering and residual adhesive. Rinse, dry, and prime as above. For surfaces other than drywall/plaster, consult Everything Hospitality for special preparation.

Application

- Install rolls in numerical sequence, starting with roll #1. Number and hang each strip in order.
- For random match patterns, reverse hang every other strip. After three strips, inspect for pattern acceptability. If unsatisfactory, re-hang strip #2 without reversing. Do not continue until approved. Claims beyond three strips will not be accepted.
- Seams may be table trimmed or double-cut on the wall for random match patterns; do not score the drywall. Matched patterns may require table trimming.
- Apply undiluted adhesive to the fabric backing with a pasting machine or short-nap roller. Use a quality pre-mixed adhesive suited to the wallcovering weight. Book per adhesive manufacturer recommendations. Keep adhesive at 65–78°F.
- Hang each strip and smooth with a smoothing brush. Do not skip areas above doors or around windows. Stagger vertical seams at least six inches from corners. Use a heat gun for rounding corners only after testing the finish. Clean excess adhesive from seams immediately.

WARRANTY

Vinyl wallcovering is guaranteed to be free of defects in workmanship and materials for one year. Claims are not honored if these instructions are not followed. Labor and associated costs beyond replacement material are not covered. Represented by Everything Hospitality — Rich Friedman, 732-343-4266, rich@everythinghospitality.com, everythinghospitality.com.

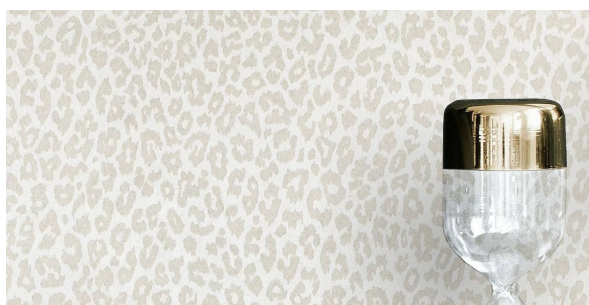

Feline — installed look




Platinum




Snow



Sand



Greige



Steel



Komodo



Caribe

Samples:
732-343-4266

PATTERN · TYPE II VINYL · 13 COLORWAYS

KINETIC

Kinetic is inspired by the eloquent beauty of the night sky. A blend of a woven and an interconnected geometric, this pattern creates a dreamlike space for any room. The interplay of texture makes a mesmerizing visual tapestry that is both contemporary and timeless. Colorways include Interstellar, Celestial Blue, Illumination, and Quantum Field.

Type II 20 oz

100% Vinyl

Non-Woven backing


52/54"

Random Match · Reversible

Class A ASTM E84

KINETIC · Colorways

13 colorways · SKUs MC185-3277 through MC185-3289

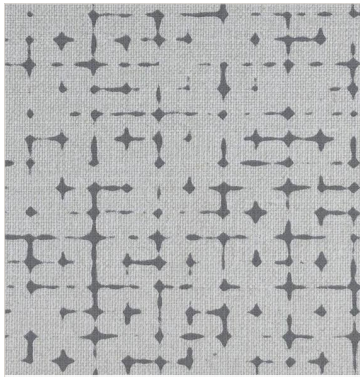


Over the Moon

MC185-3277



Illumination

MC185-3278

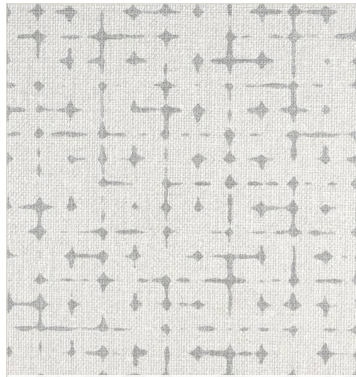

Interstellar

MC185-3279



Star Dust

MC185-3280



Subatomic

MC185-3281




Cosmos

MC185-3282



Spark

MC185-3283

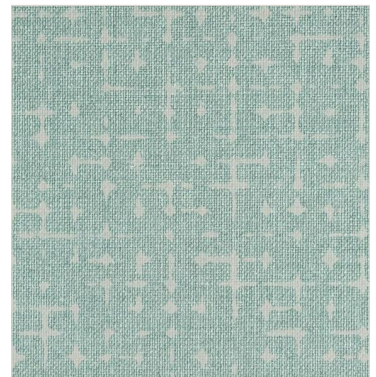


Reflection

MC185-3284




Filament

MC185-3285

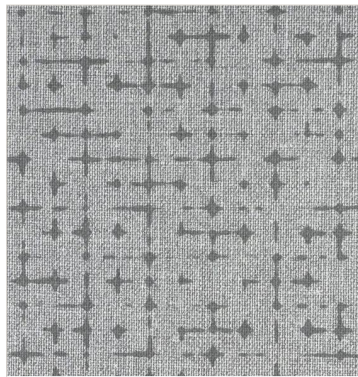


Ion Grey

MC185-3286

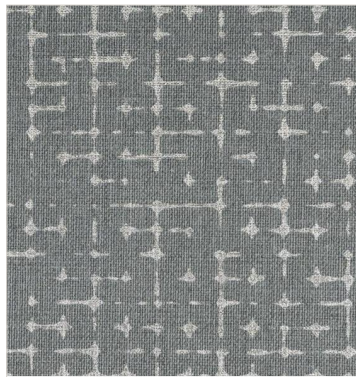

Quantum Field

MC185-3287

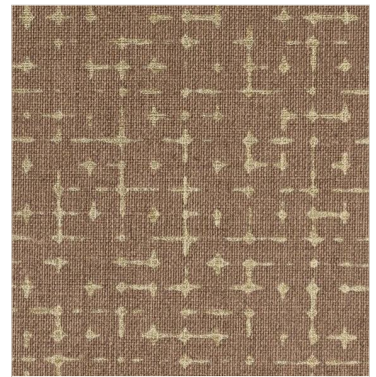

Kindle

MC185-3288



Celestial Blue

MC185-3289

SAMPLES & PROJECT QUOTES

Rich Friedman

Everything Hospitality

732-343-4266

rich@everythinghospitality.com

everythinghospitality.com

Night-sky woven geometric · Commercial Type II vinyl wallcovering

PHYSICAL PROPERTIES

WEIGHT	Type II 20 oz
CONTENT	100% Vinyl
BACKING	Non-Woven
WIDTH	52/54"
REPEAT	Random Match, Reversible
ORIGIN	Manufactured in the USA
DECLARATIONS	HPD Compliant · EPD Compliant

PERFORMANCE


- Fire Rating: Class A, ASTM E84
- Europe CE Fire Tested
- CAN/ULC S102 Fire Tested
- Color Fastness UK Test Result: BS2782 — Pass
- Meets Federal Specification CCC-W-408D for scrubbability, washability, and stain resistance
- IMO certification available upon request (flame spread, smoke, and toxicity)

Sustainability

- Low emitting — passes Cal 01350 Standard (LEED EQ 4.2)
- NSF/ANSI 342 Silver certified for responsible manufacturing and sustainable performance
- Product contains up to 40% recycled content
- Free of conflict minerals, heavy metals, solvents, phthalates (BBP, DBP, DEHP, DIDP, DnHP, DnOP), and PFC/PFOA
- Printed with solvent-free inks
- CE Declaration of Conformity
- HPD Compliant and EPD Compliant
- Contributes to LEED credits for commercial and residential projects
- Crafted with low-emitting materials to support healthier indoor air

Colorways at a glance


13 colorways — full-size swatches on the colorways page



Over the Moon



Illumination



Interstellar



Star Dust




Subatomic



Cosmos




Spark




Reflection



Filament



Ion Grey



Quantum Field



Kindle



Celestial Blue

SAMPLES & QUOTES

732-343-4266

everythinghospitality.com

SPECIFICATION NOTE

All wall surfacing materials, including wallcoverings, should be selected with the building in mind. Buildings with liquid or vapor moisture infiltration — or conditions that make it likely — are at risk for mold growth. Consult a professional about the benefits and limitations of wallcovering in those settings. Textural patterns are designed to simulate natural materials; variation in color, texture, and shading is part of the manufacturing process and adds to the richness of the product.

Read in full before hanging · Deviations may void later claims

STOP AND READ BEFORE INSTALLING

STOP if any discrepancy is discovered during installation and contact Everything Hospitality before proceeding. Examine all material for correct pattern, color, quantity, and matching lot numbers. Install vinyl wallcovering only under permanent lighting. Maintain 60–80°F and 50% relative humidity or less for at least six days before and after installation.

Surface Preparation


- All surfaces must be smooth, clean, dry, and structurally sound. Newly plastered walls should have minimal lime or alkali and less than 4% residual moisture (confirm with a moisture meter).
- Prime new drywall/plaster with a high-quality, adhesion-promoting acrylic or latex wallcovering primer. If moisture is present, apply an oil-based primer first as a barrier, then acrylic or latex over it. Do not hang vinyl directly on oil-based primer.
- Perform an adhesion test to confirm primer and adhesive compatibility. Allow at least 14 days before removing test strips.
- Existing walls: sand glossy surfaces, repair irregularities, and prime. Score a shallow “X” and apply masking tape — if paint peels, it must be removed. Hold a wet sponge 15–20 seconds; if color transfers, remove the paint.
- Completely remove old wallcovering and residual adhesive. Rinse, dry, and prime as above. For surfaces other than drywall/plaster, consult Everything Hospitality for special preparation.

Application


- Install rolls in numerical sequence, starting with roll #1. Number and hang each strip in order.
- For random match patterns, reverse hang every other strip. After three strips, inspect for pattern acceptability. If unsatisfactory, re-hang strip #2 without reversing. Do not continue until approved. Claims beyond three strips will not be accepted.
- Seams may be table trimmed or double-cut on the wall for random match patterns; do not score the drywall. Matched patterns may require table trimming.
- Apply undiluted adhesive to the fabric backing with a pasting machine or short-nap roller. Use a quality pre-mixed adhesive suited to the wallcovering weight. Book per adhesive manufacturer recommendations. Keep adhesive at 65–78°F.
- Hang each strip and smooth with a smoothing brush. Do not skip areas above doors or around windows. Stagger vertical seams at least six inches from corners. Use a heat gun for rounding corners only after testing the finish. Clean excess adhesive from seams immediately.

WARRANTY

Vinyl wallcovering is guaranteed to be free of defects in workmanship and materials for one year. Claims are not honored if these instructions are not followed. Labor and associated costs beyond replacement material are not covered. Represented by Everything Hospitality — Rich Friedman, 732-343-4266, rich@everythinghospitality.com, everythinghospitality.com.

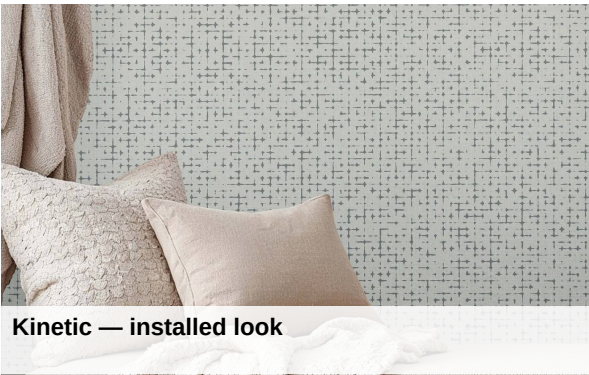

Kinetic — installed look

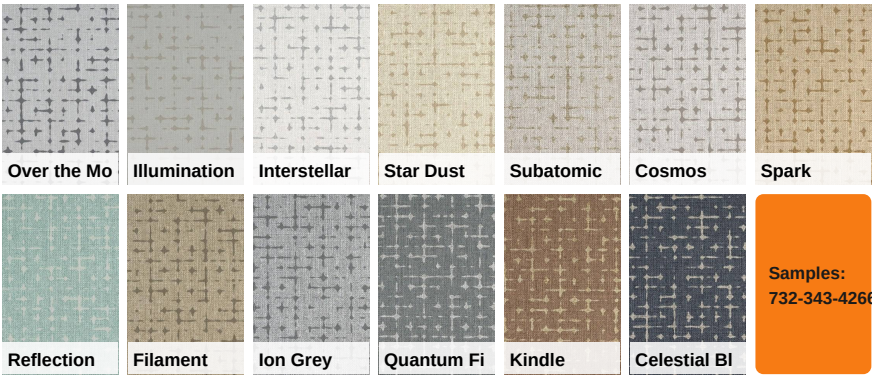

PATTERN · TYPE II VINYL · 13 COLORWAYS

MERIDIAN

Kinetic's coordinating texture, Meridian, is the perfect backdrop for any interior. A stylish but simplistic weave, Meridian comes in a variety of colors that will accent all types of decor and furnishings within the room. Sample Cosmos or Star Dust for an effective neutral; or Kindle and Reflection for a bolder take.

Type II 20 oz

100% Vinyl

Osnaburg backing

52/54"

Random Match · Reversible


Class A ASTM E84

MERIDIAN · Colorways


13 colorways · SKUs MC186-3290 through MC186-3302



Over the Moon
MC186-3290

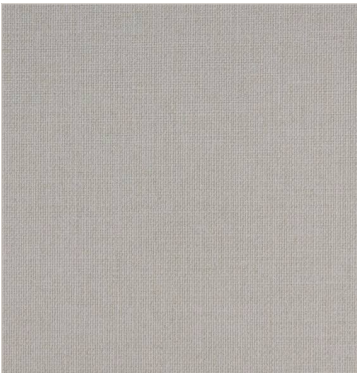


Illumination
MC186-3291

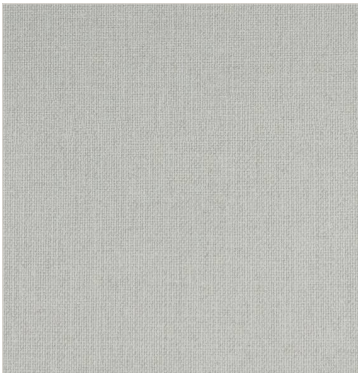


Interstellar
MC186-3292




Star Dust
MC186-3293

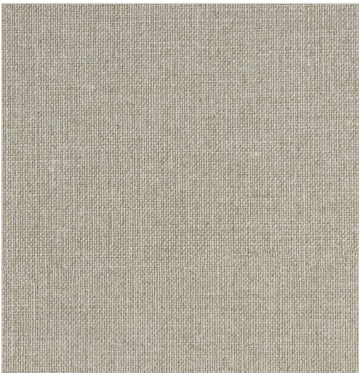


Subatomic
MC186-3294

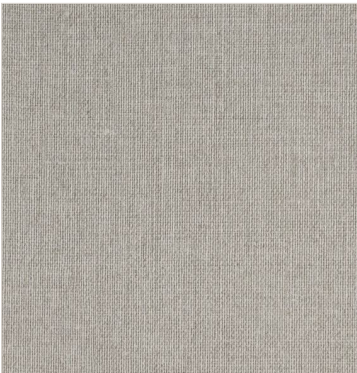


Cosmos
MC186-3295

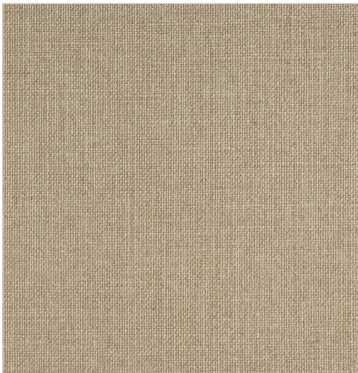


Spark
MC186-3296

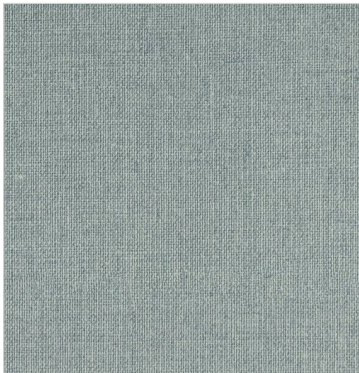


Reflection
MC186-3297

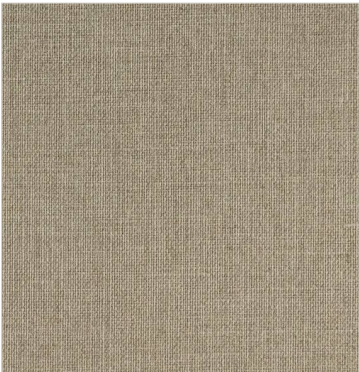

Filament
MC186-3298

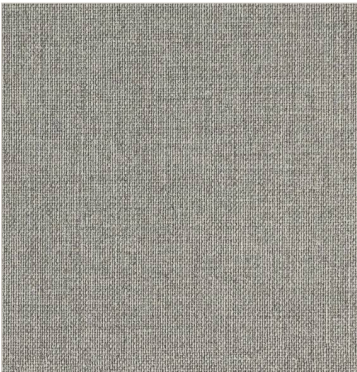


Ion Grey
MC186-3299

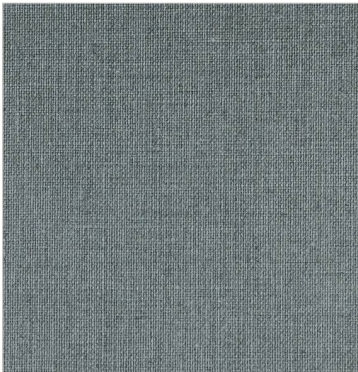

Quantum Field
MC186-3300



Kindle
MC186-3301

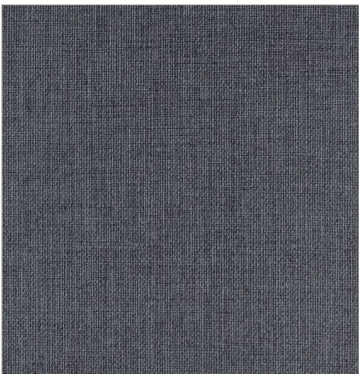

Celestial Blue
MC186-3302

SAMPLES & PROJECT QUOTES

Rich Friedman

Everything Hospitality

732-343-4266

rich@everythinghospitality.com

everythinghospitality.com

MERIDIAN · Specifications

Coordinating weave texture · Commercial Type II vinyl wallcovering

PHYSICAL PROPERTIES

WEIGHT	Type II 20 oz
CONTENT	100% Vinyl
BACKING	Osnaburg
WIDTH	52/54"
REPEAT	Random Match, Reversible
ORIGIN	Manufactured in the USA
DECLARATIONS	HPD Compliant · EPD Compliant

PERFORMANCE


- Fire Rating: Class A, ASTM E84
- Europe CE Fire Tested
- CAN/ULC S102 Fire Tested
- Color Fastness UK Test Result: BS2782 — Pass
- Meets Federal Specification CCC-W-408D for scrubbability, washability, and stain resistance
- IMO certification available upon request (flame spread, smoke, and toxicity)

Sustainability


- Low emitting — passes Cal 01350 Standard (LEED EQ 4.2)
- NSF/ANSI 342 certified for responsible manufacturing and sustainable performance
- Product contains up to 40% recycled content
- Free of conflict minerals, heavy metals, solvents, phthalates (BBP, DBP, DEHP, DIDP, DnHP, DnOP), and PFC/PFOA
- Printed with solvent-free inks
- CE Declaration of Conformity
- HPD Compliant and EPD Compliant
- Contributes to LEED credits for commercial and residential projects
- Crafted with low-emitting materials to support healthier indoor air

Colorways at a glance


13 colorways — full-size swatches on the colorways page



Over the Moon



Illumination



Interstellar




Star Dust



Subatomic



Cosmos



Spark



Reflection



Filament




Ion Grey



Quantum Field



Kindle



Celestial Blue

SAMPLES & QUOTES

732-343-4266

everythinghospitality.com

SPECIFICATION NOTE

All wall surfacing materials, including wallcoverings, should be selected with the building in mind. Buildings with liquid or vapor moisture infiltration — or conditions that make it likely — are at risk for mold growth. Consult a professional about the benefits and limitations of wallcovering in those settings. Textural patterns are designed to simulate natural materials; variation in color, texture, and shading is part of the manufacturing process and adds to the richness of the product.

Read in full before hanging · Deviations may void later claims

STOP AND READ BEFORE INSTALLING

STOP if any discrepancy is discovered during installation and contact Everything Hospitality before proceeding. Examine all material for correct pattern, color, quantity, and matching lot numbers. Install vinyl wallcovering only under permanent lighting. Maintain 60–80°F and 50% relative humidity or less for at least six days before and after installation.

Surface Preparation

- All surfaces must be smooth, clean, dry, and structurally sound. Newly plastered walls should have minimal lime or alkali and less than 4% residual moisture (confirm with a moisture meter).
- Prime new drywall/plaster with a high-quality, adhesion-promoting acrylic or latex wallcovering primer. If moisture is present, apply an oil-based primer first as a barrier, then acrylic or latex over it. Do not hang vinyl directly on oil-based primer.
- Perform an adhesion test to confirm primer and adhesive compatibility. Allow at least 14 days before removing test strips.
- Existing walls: sand glossy surfaces, repair irregularities, and prime. Score a shallow “X” and apply masking tape — if paint peels, it must be removed. Hold a wet sponge 15–20 seconds; if color transfers, remove the paint.
- Completely remove old wallcovering and residual adhesive. Rinse, dry, and prime as above. For surfaces other than drywall/plaster, consult Everything Hospitality for special preparation.

Application

- Install rolls in numerical sequence, starting with roll #1. Number and hang each strip in order.
- For random match patterns, reverse hang every other strip. After three strips, inspect for pattern acceptability. If unsatisfactory, re-hang strip #2 without reversing. Do not continue until approved. Claims beyond three strips will not be accepted.
- Seams may be table trimmed or double-cut on the wall for random match patterns; do not score the drywall. Matched patterns may require table trimming.
- Apply undiluted adhesive to the fabric backing with a pasting machine or short-nap roller. Use a quality pre-mixed adhesive suited to the wallcovering weight. Book per adhesive manufacturer recommendations. Keep adhesive at 65–78°F.
- Hang each strip and smooth with a smoothing brush. Do not skip areas above doors or around windows. Stagger vertical seams at least six inches from corners. Use a heat gun for rounding corners only after testing the finish. Clean excess adhesive from seams immediately.

WARRANTY

Vinyl wallcovering is guaranteed to be free of defects in workmanship and materials for one year. Claims are not honored if these instructions are not followed. Labor and associated costs beyond replacement material are not covered. Represented by Everything Hospitality — Rich Friedman, 732-343-4266, rich@everythinghospitality.com, everythinghospitality.com.



Meridian — installed look



PATTERN · TYPE II VINYL · 5 COLORWAYS

OTAHIETE All Colorways

Type II 20 oz · 52/54" · Random Match · 100% Vinyl / Osnaburg

PERFORMANCE

- Fire Rating: Class A, ASTM E84
- Europe CE Fire Tested
- Meets W-101 WA Quality Standard
- Meets CCC-W-408D scrub / wash / stain

SUSTAINABILITY

- Low-emitting — Cal 01350 (LEED EQ 4.2)
- Up to 40% recycled content
- No conflict minerals, heavy metals, solvents, phthalates
- PFC/PFOA-free · Solvent-free inks
- Made in USA

Available Colorways

Samples and project quotes: 732-343-4266



Grey
YFC-4218




Chestnut
YFC-4219



Oak
YFC-4220



Ash
YFC-4221

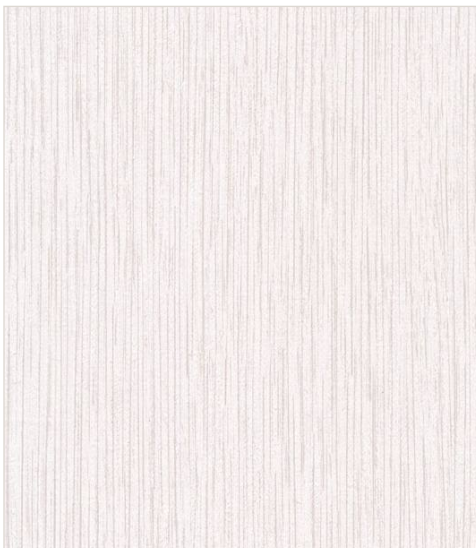

White Birch
YFC-4222

SAMPLES & PROJECT QUOTES

Rich Friedman

Everything Hospitality

732-343-4266

rich@everythinghospitality.com

everythinghospitality.com

PATTERN · TYPE II VINYL · 7 COLORWAYS

SERPENT

Serpent pairs a classic animal-print motif with polished, high-fashion colorways. From Snow and Platinum to Steel, Komodo, and Caribe — with Sand and Greige in between — the pattern adds cultivated interest and decorative edge to hospitality and commercial interiors.

Type II 20 oz

100% Vinyl

Osnaburg backing

52/54"

Random Match · Reversible


Class A ASTM E84

SERPENT · Colorways


7 colorways · SKUs MC142-2737 through MC142-2743




Sand
MC142-2737

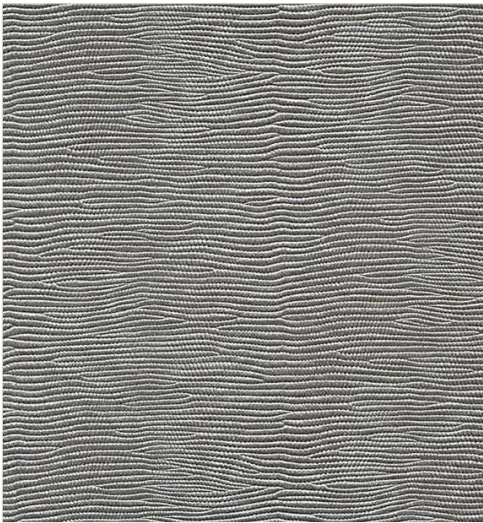


Greige
MC142-2738

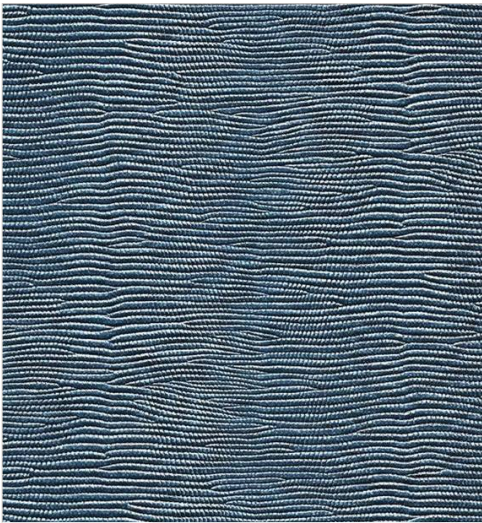


Steel
MC142-2739

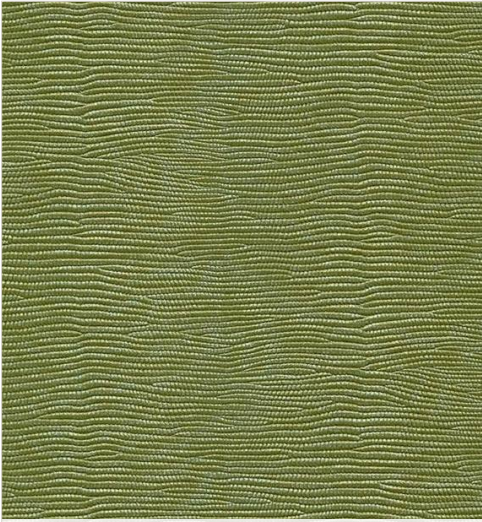


Komodo
MC142-2740

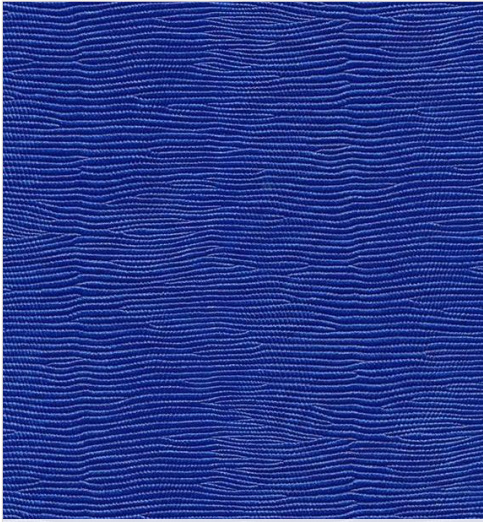

Caribe
MC142-2741

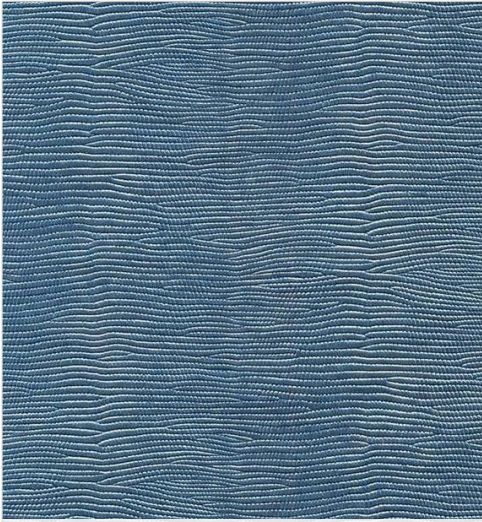

Platinum
MC142-2742

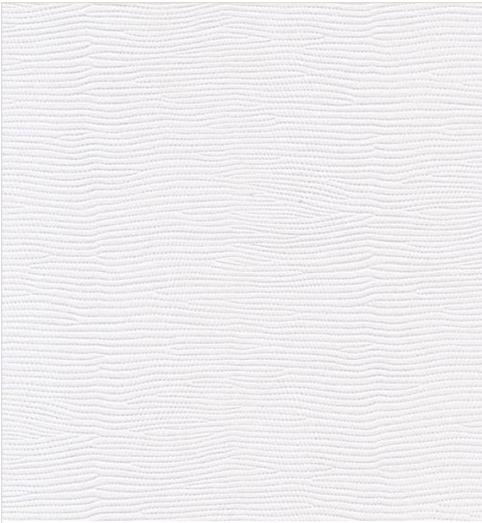

Snow
MC142-2743

SAMPLES & PROJECT QUOTES

Rich Friedman

Everything Hospitality

732-343-4266

rich@everythinghospitality.com

everythinghospitality.com

SERPENT · Specifications

Polished animal-print motif · Commercial Type II vinyl wallcovering

PHYSICAL PROPERTIES

WEIGHT	Type II 20 oz
CONTENT	100% Vinyl
BACKING	Osnaburg
WIDTH	52/54"
REPEAT	Random Match, Reversible
ORIGIN	Manufactured in the USA
DECLARATIONS	HPD Compliant · EPD Compliant

PERFORMANCE

- Fire Rating: Class A, ASTM E84
- Europe CE Fire Tested
- CAN/ULC S102 Fire Tested
- Color Fastness UK Test Result: BS2782 — Pass
- Meets Federal Specification CCC-W-408D for scrubbability, washability, and stain resistance
- IMO certification available upon request (flame spread, smoke, and toxicity)

Sustainability

- Low emitting — passes Cal 01350 Standard (LEED EQ 4.2)
- NSF/ANSI 342 certified for responsible manufacturing and sustainable performance
- Product contains up to 40% recycled content
- Free of conflict minerals, heavy metals, solvents, phthalates (BBP, DBP, DEHP, DIDP, DnHP, DnOP), and PFC/PFOA
- Printed with solvent-free inks
- CE Declaration of Conformity
- HPD Compliant and EPD Compliant
- Contributes to LEED credits for commercial and residential projects
- Crafted with low-emitting materials to support healthier indoor air

Colorways at a glance

7 colorways — full-size swatches on the colorways page




Sand



Greige



Steel

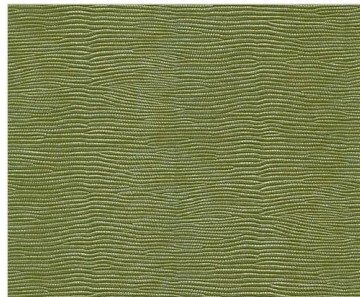


Komodo



Caribe



Platinum

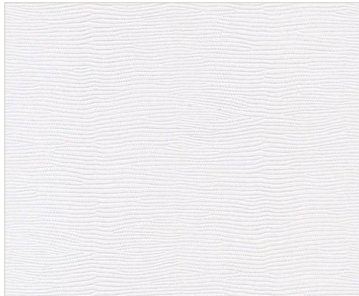

Snow

SAMPLES & QUOTES

732-343-4266

rich@everythinghospitality.com
everythinghospitality.com

SPECIFICATION NOTE

All wall surfacing materials, including wallcoverings, should be selected with the building in mind. Buildings with liquid or vapor moisture infiltration — or conditions that make it likely — are at risk for mold growth. Consult a professional about the benefits and limitations of wallcovering in those settings. Textural patterns are designed to simulate natural materials; variation in color, texture, and shading is part of the manufacturing process and adds to the richness of the product.

Read in full before hanging · Deviations may void later claims

STOP AND READ BEFORE INSTALLING

STOP if any discrepancy is discovered during installation and contact Everything Hospitality before proceeding. Examine all material for correct pattern, color, quantity, and matching lot numbers. Install vinyl wallcovering only under permanent lighting. Maintain 60–80°F and 50% relative humidity or less for at least six days before and after installation.

Surface Preparation

- All surfaces must be smooth, clean, dry, and structurally sound. Newly plastered walls should have minimal lime or alkali and less than 4% residual moisture (confirm with a moisture meter).
- Prime new drywall/plaster with a high-quality, adhesion-promoting acrylic or latex wallcovering primer. If moisture is present, apply an oil-based primer first as a barrier, then acrylic or latex over it. Do not hang vinyl directly on oil-based primer.
- Perform an adhesion test to confirm primer and adhesive compatibility. Allow at least 14 days before removing test strips.
- Existing walls: sand glossy surfaces, repair irregularities, and prime. Score a shallow “X” and apply masking tape — if paint peels, it must be removed. Hold a wet sponge 15–20 seconds; if color transfers, remove the paint.
- Completely remove old wallcovering and residual adhesive. Rinse, dry, and prime as above. For surfaces other than drywall/plaster, consult Everything Hospitality for special preparation.

Application

- Install rolls in numerical sequence, starting with roll #1. Number and hang each strip in order.
- For random match patterns, reverse hang every other strip. After three strips, inspect for pattern acceptability. If unsatisfactory, re-hang strip #2 without reversing. Do not continue until approved. Claims beyond three strips will not be accepted.
- Seams may be table trimmed or double-cut on the wall for random match patterns; do not score the drywall. Matched patterns may require table trimming.
- Apply undiluted adhesive to the fabric backing with a pasting machine or short-nap roller. Use a quality pre-mixed adhesive suited to the wallcovering weight. Book per adhesive manufacturer recommendations. Keep adhesive at 65–78°F.
- Hang each strip and smooth with a smoothing brush. Do not skip areas above doors or around windows. Stagger vertical seams at least six inches from corners. Use a heat gun for rounding corners only after testing the finish. Clean excess adhesive from seams immediately.

WARRANTY

Vinyl wallcovering is guaranteed to be free of defects in workmanship and materials for one year. Claims are not honored if these instructions are not followed. Labor and associated costs beyond replacement material are not covered. Represented by Everything Hospitality — Rich Friedman, 732-343-4266, rich@everythinghospitality.com, everythinghospitality.com.



PATTERN · TYPE II VINYL · 16 COLORWAYS

ZAYA

Zaya is a contemporary reinterpretation of a classic pattern, offering a harmonious blend of textures that evoke tailored linen, raw silk, and subtle patchwork. Inspired by the lines of global terrains, this mid-scale motif translates the essence of natural and built landscapes into a visually engaging, tactile surface.

Type II 20 oz

100% Vinyl

Osnaburg backing

52/54"

Random Match

Class A ASTM E84

ZAYA · Colorways

16 colorways · SKUs MC122-2448 through MC122-2463



White Linen
MC122-2448




Bisque
MC122-2449




Ivory
MC122-2450




Fawn
MC122-2451

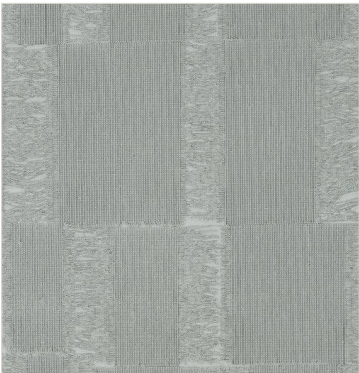

Sterling
MC122-2452

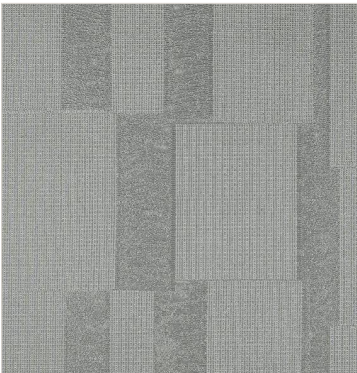

Dove
MC122-2453

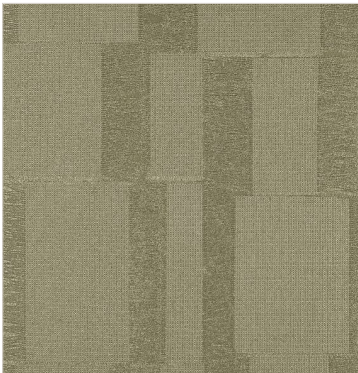

Champagne
MC122-2454



Bronze
MC122-2455



18 Karet
MC122-2456




Platinum
MC122-2457




Wasabe
MC122-2458



Slate
MC122-2459

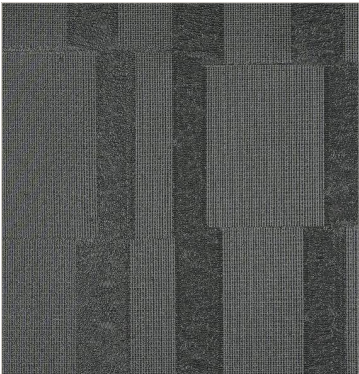


Charcoal
MC122-2460

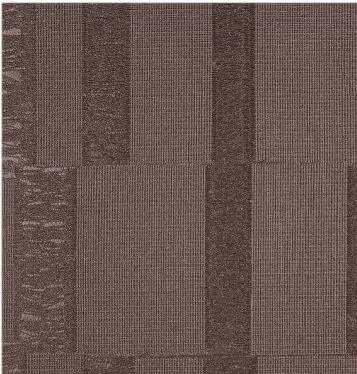

Copper
MC122-2461



Chocolate
MC122-2462

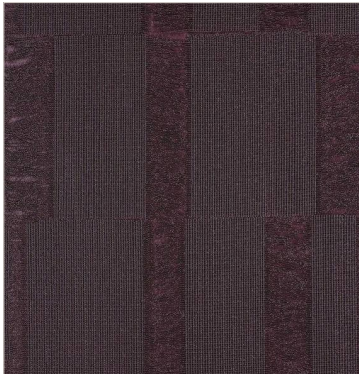

Plum
MC122-2463

ZAYA · Specifications

Linen–silk patchwork motif · Commercial Type II vinyl wallcovering

PHYSICAL PROPERTIES

WEIGHT	Type II 20 oz
CONTENT	100% Vinyl
BACKING	Osnaburg
WIDTH	52/54"
REPEAT	Random Match
ORIGIN	Manufactured in the USA
DECLARATIONS	HPD Compliant · EPD Compliant

PERFORMANCE


- Fire Rating: Class A, ASTM E84
- Europe CE Fire Tested
- CAN/ULC S102 Fire Tested
- Color Fastness UK Test Result: BS2782 — Pass
- Meets Federal Specification CCC-W-408D for scrubbability, washability, and stain resistance
- IMO certification available upon request (flame spread, smoke, and toxicity)

Sustainability

- Low emitting — passes Cal 01350 Standard (LEED EQ 4.2)
- NSF/ANSI 342 certified for responsible manufacturing and sustainable performance
- Product contains up to 40% recycled content
- Free of conflict minerals, heavy metals, solvents, phthalates (BBP, DBP, DEHP, DIDP, DnHP, DnOP), and PFC/PFOA
- Printed with solvent-free inks
- CE Declaration of Conformity
- HPD Compliant and EPD Compliant
- Contributes to LEED credits for commercial and residential projects
- Crafted with low-emitting materials to support healthier indoor air

Colorways at a glance

16 colorways — full-size swatches on the colorways page

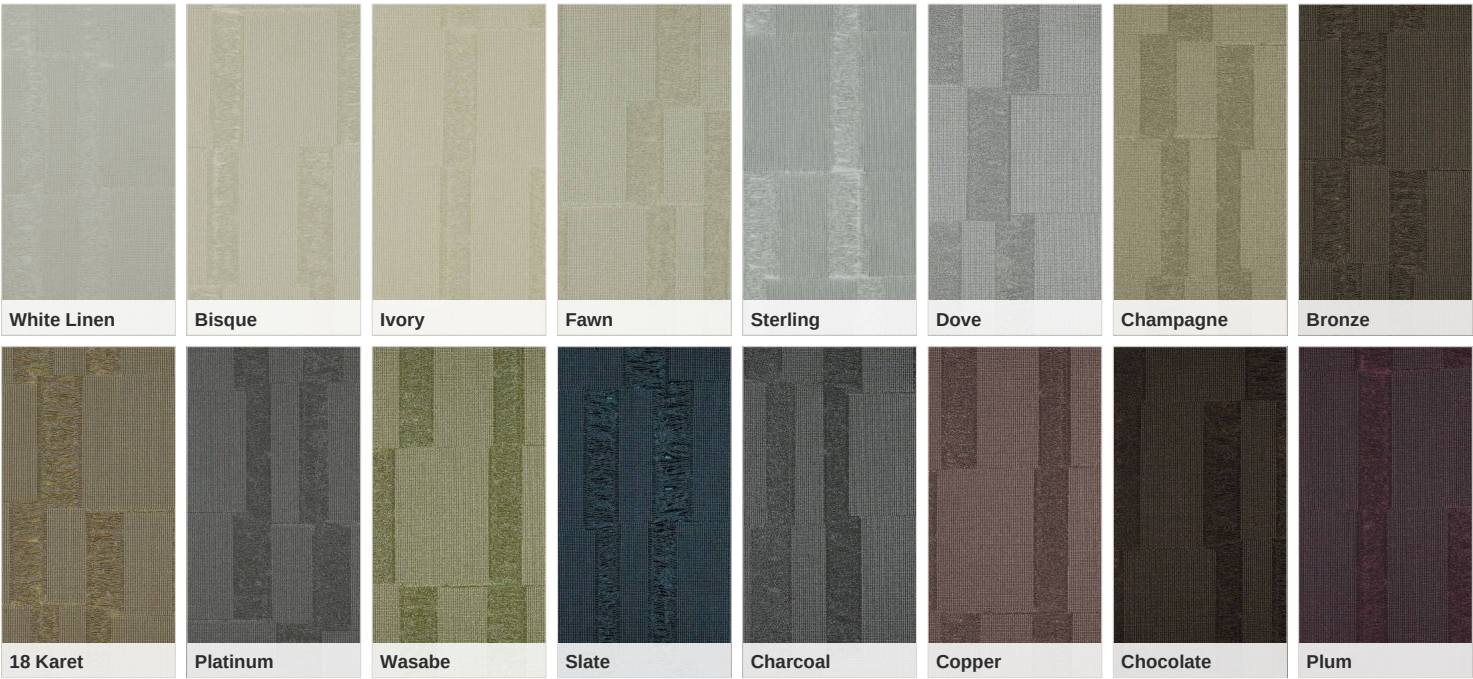

SPECIFICATION NOTE

All wall surfacing materials, including wallcoverings, should be selected with the building in mind. Buildings with liquid or vapor moisture infiltration — or conditions that make it likely — are at risk for mold growth. Consult a professional about the benefits and limitations of wallcovering in those settings. Textural patterns are designed to simulate natural materials; variation in color, texture, and shading is part of the manufacturing process and adds to the richness of the product.

Read in full before hanging · Deviations may void later claims

STOP AND READ BEFORE INSTALLING

STOP if any discrepancy is discovered during installation and contact Everything Hospitality before proceeding. Examine all material for correct pattern, color, quantity, and matching lot numbers. Install vinyl wallcovering only under permanent lighting. Maintain 60–80°F and 50% relative humidity or less for at least six days before and after installation.

Surface Preparation


- All surfaces must be smooth, clean, dry, and structurally sound. Newly plastered walls should have minimal lime or alkali and less than 4% residual moisture (confirm with a moisture meter).
- Prime new drywall/plaster with a high-quality, adhesion-promoting acrylic or latex wallcovering primer. If moisture is present, apply an oil-based primer first as a barrier, then acrylic or latex over it. Do not hang vinyl directly on oil-based primer.
- Perform an adhesion test to confirm primer and adhesive compatibility. Allow at least 14 days before removing test strips.
- Existing walls: sand glossy surfaces, repair irregularities, and prime. Score a shallow “X” and apply masking tape — if paint peels, it must be removed. Hold a wet sponge 15–20 seconds; if color transfers, remove the paint.
- Completely remove old wallcovering and residual adhesive. Rinse, dry, and prime as above. For surfaces other than drywall/plaster, consult Everything Hospitality for special preparation.

Application

- Install rolls in numerical sequence, starting with roll #1. Number and hang each strip in order.
- For random match patterns, reverse hang every other strip. After three strips, inspect for pattern acceptability. If unsatisfactory, re-hang strip #2 without reversing. Do not continue until approved. Claims beyond three strips will not be accepted.
- Seams may be table trimmed or double-cut on the wall for random match patterns; do not score the drywall. Matched patterns may require table trimming.
- Apply undiluted adhesive to the fabric backing with a pasting machine or short-nap roller. Use a quality pre-mixed adhesive suited to the wallcovering weight. Book per adhesive manufacturer recommendations. Keep adhesive at 65–78°F.
- Hang each strip and smooth with a smoothing brush. Do not skip areas above doors or around windows. Stagger vertical seams at least six inches from corners. Use a heat gun for rounding corners only after testing the finish. Clean excess adhesive from seams immediately.

WARRANTY

Vinyl wallcovering is guaranteed to be free of defects in workmanship and materials for one year. Claims are not honored if these instructions are not followed. Labor and associated costs beyond replacement material are not covered. Represented by Everything Hospitality — Rich Friedman, 732-343-4266, rich@everythinghospitality.com, everythinghospitality.com.

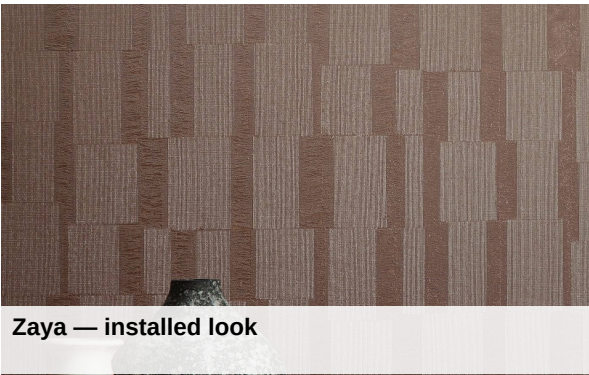

Zaya — installed look

