



Commercial Wallcoverings Lookbook

Direct-source pricing · Samples · Project quotes

For hospitality, healthcare, corporate & education projects

Browse collection pages inside. Ask for samples or a project quote anytime.

everythinghospitality.com

Rich Friedman

732-343-4266 · rich@everythinghospitality.com

everythinghospitality.com

Contents

Collections in alphabetical order

COLLECTION	PAGES
Aja	3–6
Cortona	7
Dalyan	8
Encore	9
Gemini Stripe	10–13
Intermezzo	14
Kepler	15–18
Orbit	19–22
Tahiti Satin	23

Rich Friedman · 732-343-4266 · rich@everythinghospitality.com



PATTERN · TYPE II VINYL · 16 COLORWAYS

AJA

Aja is a contemporary reinterpretation of a classic pattern, offering a harmonious blend of textures that evoke tailored linen, raw silk, and subtle patchwork. Inspired by the lines of global terrains, this mid-scale motif translates the essence of natural and built landscapes into a visually engaging, tactile surface.

Type II 20 oz

100% Vinyl

Osnaburg backing

52/54"

Random Match

Class A ASTM E84

AJA · Colorways

16 colorways · SKUs CM122-2448 through CM122-2463



White Linen
CM122-2448




Bisque
CM122-2449



Ivory
CM122-2450



Fawn
CM122-2451

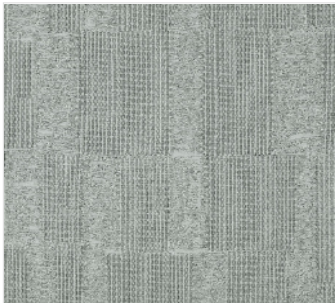

Sterling
CM122-2452




Dove
CM122-2453



Champagne
CM122-2454



Bronze
CM122-2455

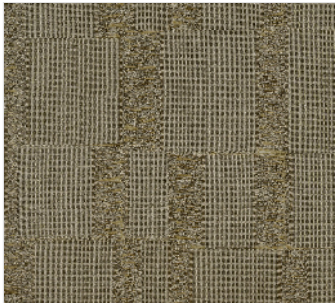


18 Karet
CM122-2456




Platinum
CM122-2457



Wasabe
CM122-2458

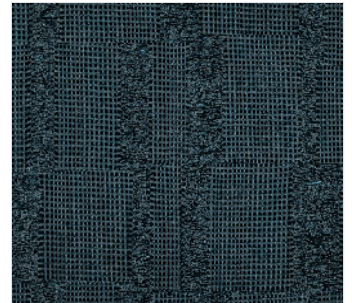

Slate
CM122-2459

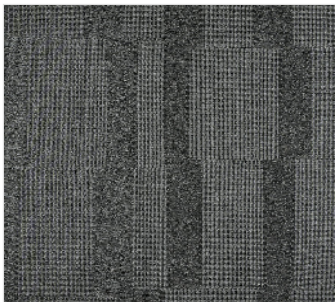


Charcoal
CM122-2460



Copper
CM122-2461



Chocolate
CM122-2462

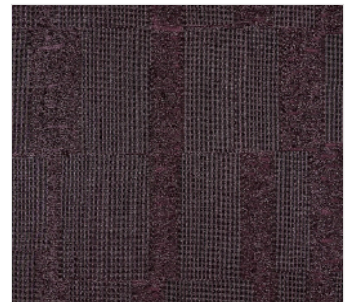

Plum
CM122-2463

AJA · Specifications

Linen–silk patchwork motif · Commercial Type II vinyl wallcovering

PHYSICAL PROPERTIES

WEIGHT

Type II 20 oz

CONTENT

100% Vinyl

BACKING

Osnaburg

WIDTH

52/54"

REPEAT

Random Match

ORIGIN

Manufactured in the USA

DECLARATIONS

HPD Compliant · EPD Compliant

PERFORMANCE

- Fire Rating: Class A, ASTM E84
- Europe CE Fire Tested
- CAN/ULC S102 Fire Tested
- Color Fastness UK Test Result: BS2782 — Pass
- Meets Federal Specification CCC-W-408D for scrubability, washability, and stain resistance
- IMO certification available upon request (flame spread, smoke, and toxicity)

Sustainability

- Low emitting — passes Cal 01350 Standard (LEED EQ 4.2)
- NSF/ANSI 342 certified for responsible manufacturing and sustainable performance
- Product contains up to 40% recycled content
- Free of conflict minerals, heavy metals, solvents, phthalates (BBP, DBP, DEHP, DIDP, DnHP, DnOP), and PFC/PFOA
- Printed with solvent-free inks
- CE Declaration of Conformity
- HPD Compliant and EPD Compliant
- Contributes to LEED credits for commercial and residential projects
- Crafted with low-emitting materials to support healthier indoor air

SPECIFICATION NOTE

All wall surfacing materials, including wallcoverings, should be selected with the building in mind. Buildings with liquid or vapor moisture infiltration — or conditions that make it likely — are at risk for mold growth. Consult a professional about the benefits and limitations of wallcovering in those settings. Textural patterns are designed to simulate natural materials; variation in color, texture, and shading is part of the manufacturing process and adds to the richness of the product.

AJA · Installation

Read in full before hanging · Deviations may void later claims

STOP AND READ BEFORE INSTALLING

STOP if any discrepancy is discovered during installation and contact Everything Hospitality before proceeding. Examine all material for correct pattern, color, quantity, and matching lot numbers. Install vinyl wallcovering only under permanent lighting. Maintain 60–80°F and 50% relative humidity or less for at least six days before and after installation.

Surface Preparation

- All surfaces must be smooth, clean, dry, and structurally sound. Newly plastered walls should have minimal lime or alkali and less than 4% residual moisture (confirm with a moisture meter).
- Prime new drywall/plaster with a high-quality, adhesion-promoting acrylic or latex wallcovering primer. If moisture is present, apply an oil-based primer first as a barrier, then acrylic or latex over it. Do not hang vinyl directly on oil-based primer.
- Perform an adhesion test to confirm primer and adhesive compatibility. Allow at least 14 days before removing test strips.
- Existing walls: sand glossy surfaces, repair irregularities, and prime. Score a shallow “X” and apply masking tape — if paint peels, it must be removed. Hold a wet sponge 15–20 seconds; if color transfers, remove the paint.
- Completely remove old wallcovering and residual adhesive. Rinse, dry, and prime as above. For surfaces other than drywall/plaster, consult Everything Hospitality for special preparation.

Application

- Install rolls in numerical sequence, starting with roll #1. Number and hang each strip in order.
- For random match patterns, reverse hang every other strip. After three strips, inspect for pattern acceptability. If unsatisfactory, re-hang strip #2 without reversing. Do not continue until approved. Claims beyond three strips will not be accepted.
- Seams may be table trimmed or double-cut on the wall for random match patterns; do not score the drywall. Matched patterns may require table trimming.
- Apply undiluted adhesive to the fabric backing with a pasting machine or short-nap roller. Use a quality pre-mixed adhesive suited to the wallcovering weight. Book per adhesive manufacturer recommendations. Keep adhesive at 65–78°F.
- Hang each strip and smooth with a smoothing brush. Do not skip areas above doors or around windows. Stagger vertical seams at least six inches from corners. Use a heat gun for rounding corners only after testing the finish. Clean excess adhesive from seams immediately.

WARRANTY

Vinyl wallcovering is guaranteed to be free of defects in workmanship and materials for one year. Claims are not honored if these instructions are not followed. Labor and associated costs beyond replacement material are not covered. Represented by Everything Hospitality — Rich Friedman, 732-343-4266, rich@everythinghospitality.com, everythinghospitality.com.

Cortona — All Colorways

Type II 20 oz · 52/54" · Random Match · 100% Vinyl / Osnaburg


PERFORMANCE

- Fire Rating: Class A, ASTM E84
- Europe CE Fire Tested
- Meets W-101 WA Quality Standard
- Meets CCC-W-408D scrub / wash / stain


SUSTAINABILITY

- Low-emitting — Cal 01350 (LEED EQ 4.2)
- Up to 40% recycled content
- No conflict minerals, heavy metals, solvents, phthalates
- PFC/PFOA-free · Solvent-free inks


Available Colorways

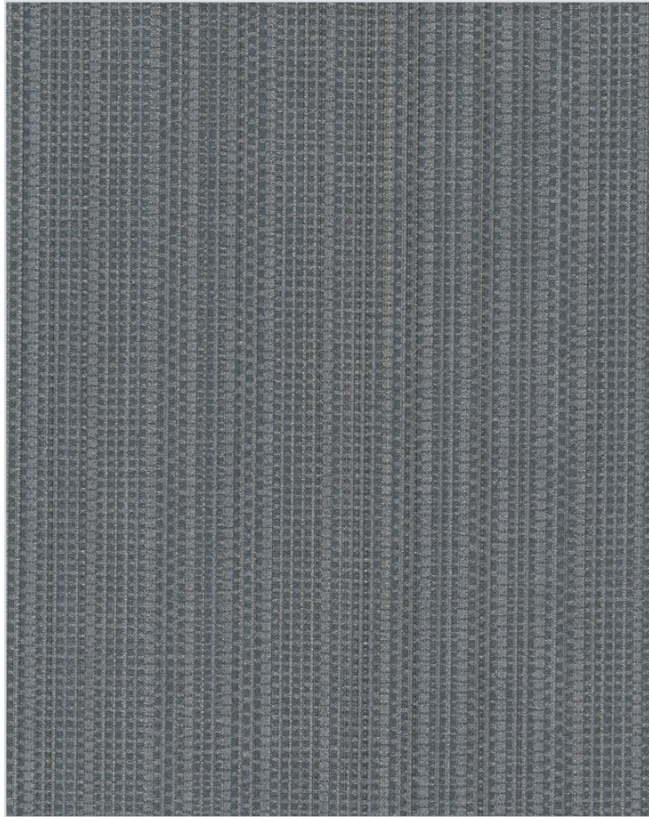

Pewter
YFC-4202

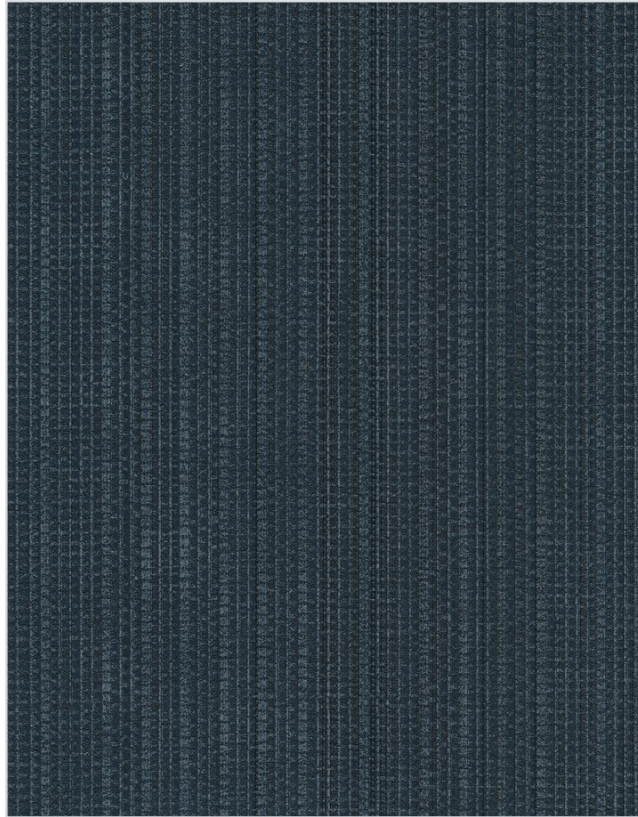


Black
YFC-4201

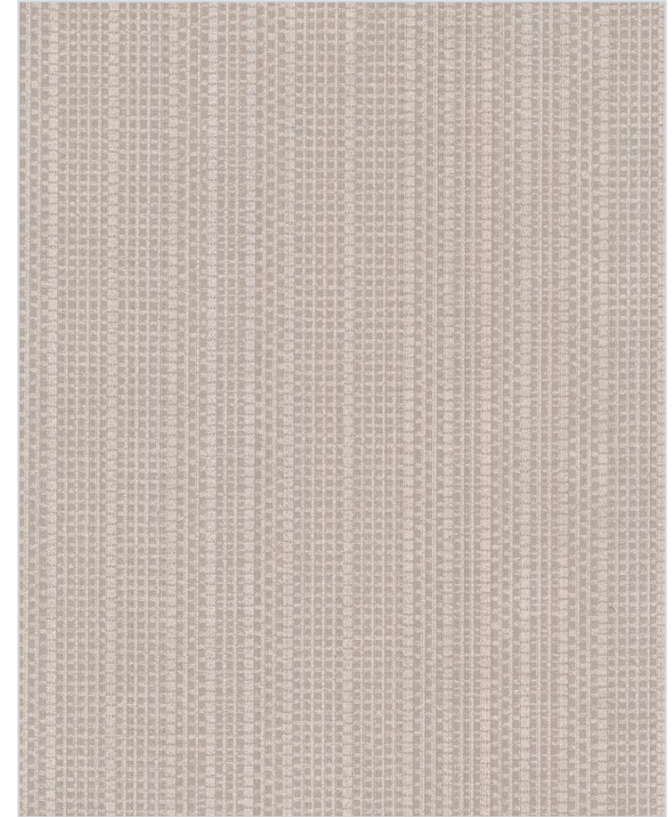

Taupe
YFC-4203

Dalyan — All Colorways

Type II 20 oz · 52/54" · Random Match · 100% Vinyl / Osnaburg
Available Colorways

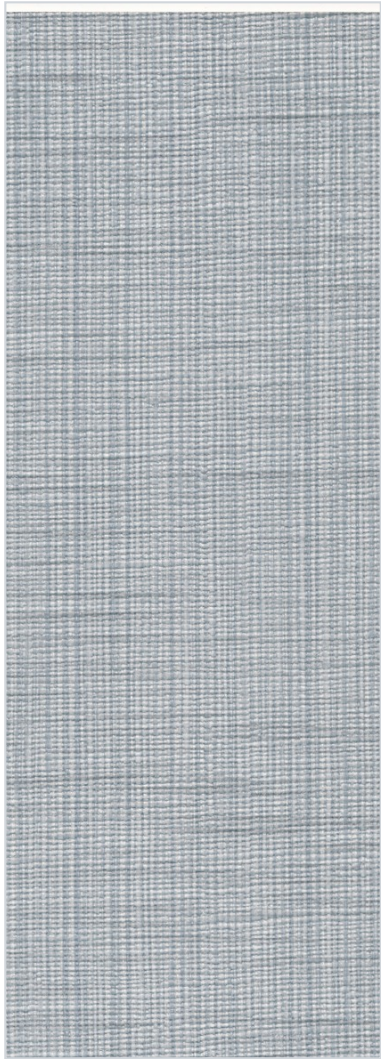

Sea
YFC-4238



Cream
YFC-4239



Fog
YFC-4237



Shimmer
YFC-4236



Snow
YFC-4240

Encore — All Colorways

Type II 20 oz · 52/54" · Random Match · 100% Vinyl / Osnaburg
Available Colorways



Mocha
YFC-4213



Ash
YFC-4217



Desert Sand
YFC-4214



Sand
YFC-4216



Taupe
YFC-4215



PATTERN · TYPE II VINYL · 9 COLORWAYS

GEMINI STRIPE

In need of a stylish and alluring wallcovering? Look no further. A valiant design, Gemini Stripe, takes three contrasting tones and sets them together, creating beautiful bands of color. This pattern is sure to liven up your space while being both captivating and calming — from a quiet muted palette to one that makes a statement.

Type II 20 oz

100% Vinyl

Non-Woven backing


52/54"

Random Match


Class A ASTM E84

GEMINI STRIPE · Colorways


9 colorways · SKUs CM188-3314 through CM188-3322

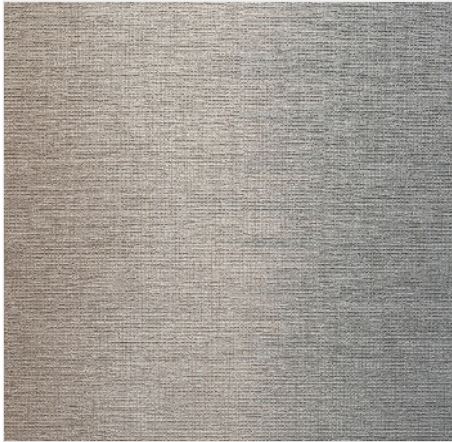

Daybreak
CM188-3314

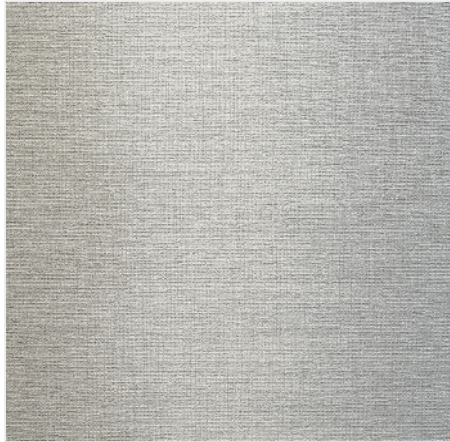

Mystic Cloud
CM188-3315

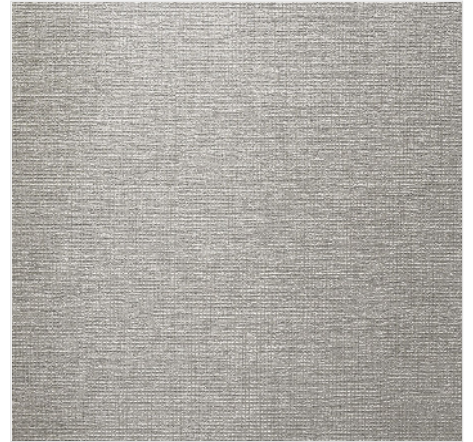

Versatile
CM188-3316




Dark Haven
CM188-3317



High Rollers
CM188-3318




Pure Sky
CM188-3319

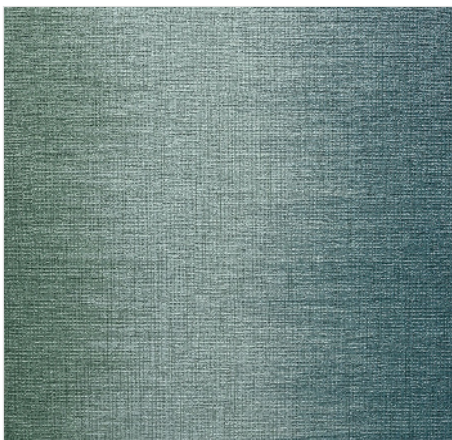

Laguna
CM188-3320



Levi
CM188-3321

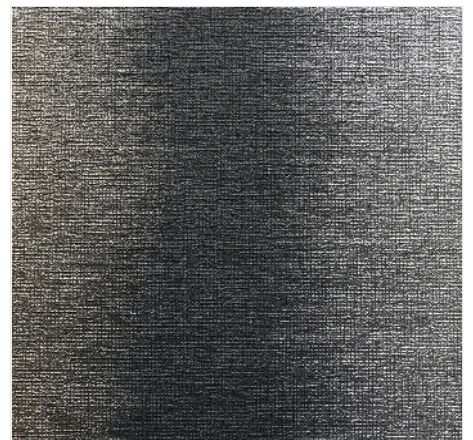

Midnight Moon
CM188-3322

GEMINI STRIPE · Specifications

Three-tone banded stripe · Commercial Type II vinyl wallcovering

PHYSICAL PROPERTIES

WEIGHT

Type II 20 oz

CONTENT

100% Vinyl

BACKING

Non-Woven

WIDTH

52/54"

REPEAT

Random Match

ORIGIN

Manufactured in the USA

DECLARATIONS

HPD Compliant · EPD Compliant

PERFORMANCE

- Fire Rating: Class A, ASTM E84
- Europe CE Fire Tested
- CAN/ULC S102 Fire Tested
- Color Fastness UK Test Result: BS2782 — Pass
- Meets Federal Specification CCC-W-408D for scrubability, washability, and stain resistance
- IMO certification available upon request (flame spread, smoke, and toxicity)

Sustainability

- Low emitting — passes Cal 01350 Standard (LEED EQ 4.2)
- NSF/ANSI 342 certified for responsible manufacturing and sustainable performance
- Product contains up to 40% recycled content
- Free of conflict minerals, heavy metals, solvents, phthalates (BBP, DBP, DEHP, DIDP, DnHP, DnOP), and PFC/PFOA
- Printed with solvent-free inks
- CE Declaration of Conformity
- HPD Compliant and EPD Compliant
- Contributes to LEED credits for commercial and residential projects
- Crafted with low-emitting materials to support healthier indoor air

SPECIFICATION NOTE

All wall surfacing materials, including wallcoverings, should be selected with the building in mind. Buildings with liquid or vapor moisture infiltration — or conditions that make it likely — are at risk for mold growth. Consult a professional about the benefits and limitations of wallcovering in those settings. Textural patterns are designed to simulate natural materials; variation in color, texture, and shading is part of the manufacturing process and adds to the richness of the product.

GEMINI STRIPE · Installation

Read in full before hanging · Deviations may void later claims

STOP AND READ BEFORE INSTALLING

STOP if any discrepancy is discovered during installation and contact Everything Hospitality before proceeding. Examine all material for correct pattern, color, quantity, and matching lot numbers. Install vinyl wallcovering only under permanent lighting. Maintain 60–80°F and 50% relative humidity or less for at least six days before and after installation.

Surface Preparation

- All surfaces must be smooth, clean, dry, and structurally sound. Newly plastered walls should have minimal lime or alkali and less than 4% residual moisture (confirm with a moisture meter).
- Prime new drywall/plaster with a high-quality, adhesion-promoting acrylic or latex wallcovering primer. If moisture is present, apply an oil-based primer first as a barrier, then acrylic or latex over it. Do not hang vinyl directly on oil-based primer.
- Perform an adhesion test to confirm primer and adhesive compatibility. Allow at least 14 days before removing test strips.
- Existing walls: sand glossy surfaces, repair irregularities, and prime. Score a shallow “X” and apply masking tape — if paint peels, it must be removed. Hold a wet sponge 15–20 seconds; if color transfers, remove the paint.
- Completely remove old wallcovering and residual adhesive. Rinse, dry, and prime as above. For surfaces other than drywall/plaster, consult Everything Hospitality for special preparation.

Application

- Install rolls in numerical sequence, starting with roll #1. Number and hang each strip in order.
- For random match patterns, reverse hang every other strip. After three strips, inspect for pattern acceptability. If unsatisfactory, re-hang strip #2 without reversing. Do not continue until approved. Claims beyond three strips will not be accepted.
- Seams may be table trimmed or double-cut on the wall for random match patterns; do not score the drywall. Matched patterns may require table trimming.
- Apply undiluted adhesive to the fabric backing with a pasting machine or short-nap roller. Use a quality pre-mixed adhesive suited to the wallcovering weight. Book per adhesive manufacturer recommendations. Keep adhesive at 65–78°F.
- Hang each strip and smooth with a smoothing brush. Do not skip areas above doors or around windows. Stagger vertical seams at least six inches from corners. Use a heat gun for rounding corners only after testing the finish. Clean excess adhesive from seams immediately.

WARRANTY

Vinyl wallcovering is guaranteed to be free of defects in workmanship and materials for one year. Claims are not honored if these instructions are not followed. Labor and associated costs beyond replacement material are not covered. Represented by Everything Hospitality — Rich Friedman, 732-343-4266, rich@everythinghospitality.com, everythinghospitality.com.

Intermezzo — All Colorways

Type II 20 oz · 52/54" · Random Match · 100% Vinyl / Osnaburg

PERFORMANCE

- Fire Rating: Class A, ASTM E84
- Europe CE Fire Tested
- Meets W-101 WA Quality Standard
- Meets CCC-W-408D scrub / wash / stain

SUSTAINABILITY

- Low-emitting — Cal 01350 (LEED EQ 4.2)
- Up to 40% recycled content
- No conflict minerals, heavy metals, solvents, phthalates
- PFC/PFOA-free · Solvent-free inks · Made in USA

AVAILABLE COLORWAYS



Blue
YFC-4208



Dark Grey
YFC-4209



Grey
YFC-4210



Bone
YFC-4211



White
YFC-4212



PATTERN · TYPE II VINYL · 13 COLORWAYS

KEPLER

Kepler is inspired by the eloquent beauty of the night sky. A blend of a woven and an interconnected geometric, this pattern creates a dreamlike space for any room. The interplay of texture makes a mesmerizing visual tapestry that is both contemporary and timeless. Colorways include Interstellar, Celestial Blue, Illumination, and Quantum Field.

Type II 20 oz

100% Vinyl

Non-Woven backing


52/54"

Random Match · Reversible


Class A ASTM E84

KEPLER · Colorways


13 colorways · SKUs CM185-3277 through CM185-3289

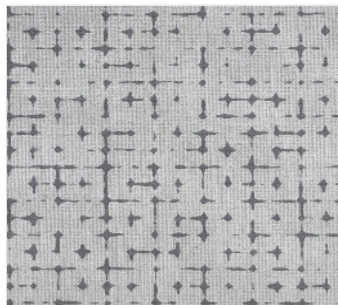

Over the Moon
CM185-3277

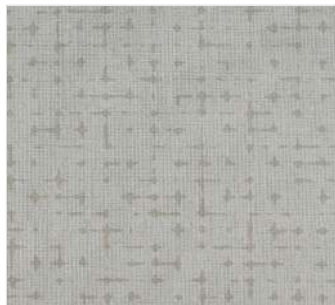

Illumination
CM185-3278

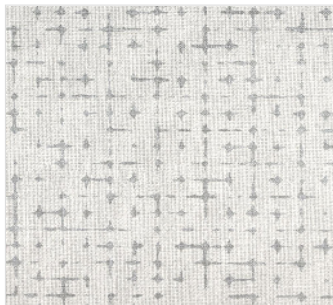

Interstellar
CM185-3279



Star Dust
CM185-3280




Subatomic
CM185-3281




Cosmos
CM185-3282




Spark
CM185-3283

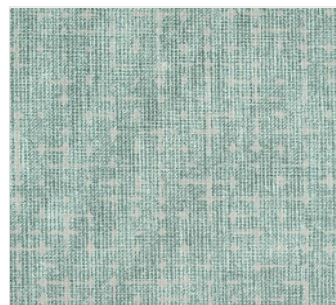


Reflection
CM185-3284

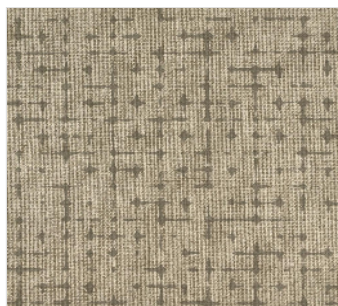

Filament
CM185-3285

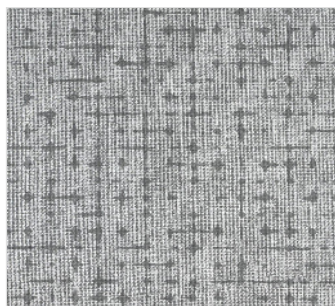

Ion Grey
CM185-3286

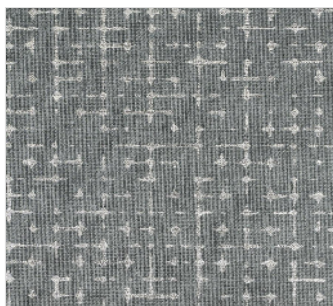

Quantum Field
CM185-3287



Kindle
CM185-3288



Celestial Blue
CM185-3289

KEPLER · Specifications

Night-sky woven geometric · Commercial Type II vinyl wallcovering

PHYSICAL PROPERTIES

WEIGHT

Type II 20 oz

CONTENT

100% Vinyl

BACKING

Non-Woven

WIDTH

52/54"

REPEAT

Random Match, Reversible

ORIGIN

Manufactured in the USA

DECLARATIONS

HPD Compliant · EPD Compliant

PERFORMANCE

- Fire Rating: Class A, ASTM E84
- Europe CE Fire Tested
- CAN/ULC S102 Fire Tested
- Color Fastness UK Test Result: BS2782 — Pass
- Meets Federal Specification CCC-W-408D for scrubability, washability, and stain resistance
- IMO certification available upon request (flame spread, smoke, and toxicity)

Sustainability

- Low emitting — passes Cal 01350 Standard (LEED EQ 4.2)
- NSF/ANSI 342 Silver certified for responsible manufacturing and sustainable performance
- Product contains up to 40% recycled content
- Free of conflict minerals, heavy metals, solvents, phthalates (BBP, DBP, DEHP, DIDP, DnHP, DnOP), and PFC/PFOA
- Printed with solvent-free inks
- CE Declaration of Conformity
- HPD Compliant and EPD Compliant
- Contributes to LEED credits for commercial and residential projects
- Crafted with low-emitting materials to support healthier indoor air

SPECIFICATION NOTE

All wall surfacing materials, including wallcoverings, should be selected with the building in mind. Buildings with liquid or vapor moisture infiltration — or conditions that make it likely — are at risk for mold growth. Consult a professional about the benefits and limitations of wallcovering in those settings. Textural patterns are designed to simulate natural materials; variation in color, texture, and shading is part of the manufacturing process and adds to the richness of the product.

KEPLER · Installation

Read in full before hanging · Deviations may void later claims

STOP AND READ BEFORE INSTALLING

STOP if any discrepancy is discovered during installation and contact Everything Hospitality before proceeding. Examine all material for correct pattern, color, quantity, and matching lot numbers. Install vinyl wallcovering only under permanent lighting. Maintain 60–80°F and 50% relative humidity or less for at least six days before and after installation.

Surface Preparation

- All surfaces must be smooth, clean, dry, and structurally sound. Newly plastered walls should have minimal lime or alkali and less than 4% residual moisture (confirm with a moisture meter).
- Prime new drywall/plaster with a high-quality, adhesion-promoting acrylic or latex wallcovering primer. If moisture is present, apply an oil-based primer first as a barrier, then acrylic or latex over it. Do not hang vinyl directly on oil-based primer.
- Perform an adhesion test to confirm primer and adhesive compatibility. Allow at least 14 days before removing test strips.
- Existing walls: sand glossy surfaces, repair irregularities, and prime. Score a shallow “X” and apply masking tape — if paint peels, it must be removed. Hold a wet sponge 15–20 seconds; if color transfers, remove the paint.
- Completely remove old wallcovering and residual adhesive. Rinse, dry, and prime as above. For surfaces other than drywall/plaster, consult Everything Hospitality for special preparation.

Application

- Install rolls in numerical sequence, starting with roll #1. Number and hang each strip in order.
- For random match patterns, reverse hang every other strip. After three strips, inspect for pattern acceptability. If unsatisfactory, re-hang strip #2 without reversing. Do not continue until approved. Claims beyond three strips will not be accepted.
- Seams may be table trimmed or double-cut on the wall for random match patterns; do not score the drywall. Matched patterns may require table trimming.
- Apply undiluted adhesive to the fabric backing with a pasting machine or short-nap roller. Use a quality pre-mixed adhesive suited to the wallcovering weight. Book per adhesive manufacturer recommendations. Keep adhesive at 65–78°F.
- Hang each strip and smooth with a smoothing brush. Do not skip areas above doors or around windows. Stagger vertical seams at least six inches from corners. Use a heat gun for rounding corners only after testing the finish. Clean excess adhesive from seams immediately.

WARRANTY

Vinyl wallcovering is guaranteed to be free of defects in workmanship and materials for one year. Claims are not honored if these instructions are not followed. Labor and associated costs beyond replacement material are not covered. Represented by Everything Hospitality — Rich Friedman, 732-343-4266, rich@everythinghospitality.com, everythinghospitality.com.



PATTERN · TYPE II VINYL · 13 COLORWAYS

ORBIT

Kepler's coordinating texture, Orbit, is the perfect backdrop for any interior. A stylish but simplistic weave, Orbit comes in a variety of colors that will accent all types of decor and furnishings within the room. Sample Cosmos or Star Dust for an effective neutral; or Kindle and Reflection for a bolder take.

Type II 20 oz

100% Vinyl

Osnaburg backing

52/54"

Random Match · Reversible

Class A ASTM E84

ORBIT · Colorways

13 colorways · SKUs CM186-3290 through CM186-3302



Over the Moon
CM186-3290



Illumination
CM186-3291



Interstellar
CM186-3292



Star Dust
CM186-3293




Subatomic
CM186-3294



Cosmos
CM186-3295




Spark
CM186-3296

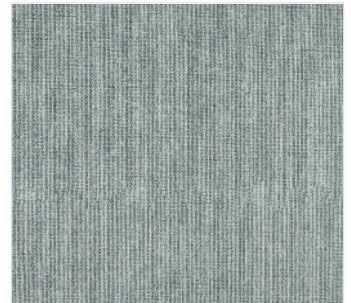


Reflection
CM186-3297



Filament
CM186-3298

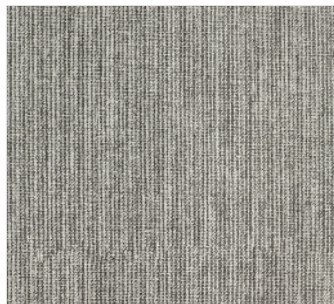

Ion Grey
CM186-3299

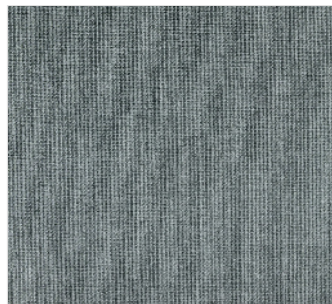

Quantum Field
CM186-3300



Kindle
CM186-3301



Celestial Blue
CM186-3302

ORBIT · Specifications

Coordinating weave texture · Commercial Type II vinyl wallcovering

PHYSICAL PROPERTIES

WEIGHT

Type II 20 oz

CONTENT

100% Vinyl

BACKING

Osnaburg

WIDTH

52/54"

REPEAT

Random Match, Reversible

ORIGIN

Manufactured in the USA

DECLARATIONS

HPD Compliant · EPD Compliant

PERFORMANCE

- Fire Rating: Class A, ASTM E84
- Europe CE Fire Tested
- CAN/ULC S102 Fire Tested
- Color Fastness UK Test Result: BS2782 — Pass
- Meets Federal Specification CCC-W-408D for scrubability, washability, and stain resistance
- IMO certification available upon request (flame spread, smoke, and toxicity)

Sustainability

- Low emitting — passes Cal 01350 Standard (LEED EQ 4.2)
- NSF/ANSI 342 certified for responsible manufacturing and sustainable performance
- Product contains up to 40% recycled content
- Free of conflict minerals, heavy metals, solvents, phthalates (BBP, DBP, DEHP, DIDP, DnHP, DnOP), and PFC/PFOA
- Printed with solvent-free inks
- CE Declaration of Conformity
- HPD Compliant and EPD Compliant
- Contributes to LEED credits for commercial and residential projects
- Crafted with low-emitting materials to support healthier indoor air

SPECIFICATION NOTE

All wall surfacing materials, including wallcoverings, should be selected with the building in mind. Buildings with liquid or vapor moisture infiltration — or conditions that make it likely — are at risk for mold growth. Consult a professional about the benefits and limitations of wallcovering in those settings. Textural patterns are designed to simulate natural materials; variation in color, texture, and shading is part of the manufacturing process and adds to the richness of the product.

ORBIT · Installation

Read in full before hanging · Deviations may void later claims

STOP AND READ BEFORE INSTALLING

STOP if any discrepancy is discovered during installation and contact Everything Hospitality before proceeding. Examine all material for correct pattern, color, quantity, and matching lot numbers. Install vinyl wallcovering only under permanent lighting. Maintain 60–80°F and 50% relative humidity or less for at least six days before and after installation.

Surface Preparation

- All surfaces must be smooth, clean, dry, and structurally sound. Newly plastered walls should have minimal lime or alkali and less than 4% residual moisture (confirm with a moisture meter).
- Prime new drywall/plaster with a high-quality, adhesion-promoting acrylic or latex wallcovering primer. If moisture is present, apply an oil-based primer first as a barrier, then acrylic or latex over it. Do not hang vinyl directly on oil-based primer.
- Perform an adhesion test to confirm primer and adhesive compatibility. Allow at least 14 days before removing test strips.
- Existing walls: sand glossy surfaces, repair irregularities, and prime. Score a shallow “X” and apply masking tape — if paint peels, it must be removed. Hold a wet sponge 15–20 seconds; if color transfers, remove the paint.
- Completely remove old wallcovering and residual adhesive. Rinse, dry, and prime as above. For surfaces other than drywall/plaster, consult Everything Hospitality for special preparation.

Application

- Install rolls in numerical sequence, starting with roll #1. Number and hang each strip in order.
- For random match patterns, reverse hang every other strip. After three strips, inspect for pattern acceptability. If unsatisfactory, re-hang strip #2 without reversing. Do not continue until approved. Claims beyond three strips will not be accepted.
- Seams may be table trimmed or double-cut on the wall for random match patterns; do not score the drywall. Matched patterns may require table trimming.
- Apply undiluted adhesive to the fabric backing with a pasting machine or short-nap roller. Use a quality pre-mixed adhesive suited to the wallcovering weight. Book per adhesive manufacturer recommendations. Keep adhesive at 65–78°F.
- Hang each strip and smooth with a smoothing brush. Do not skip areas above doors or around windows. Stagger vertical seams at least six inches from corners. Use a heat gun for rounding corners only after testing the finish. Clean excess adhesive from seams immediately.

WARRANTY

Vinyl wallcovering is guaranteed to be free of defects in workmanship and materials for one year. Claims are not honored if these instructions are not followed. Labor and associated costs beyond replacement material are not covered. Represented by Everything Hospitality — Rich Friedman, 732-343-4266, rich@everythinghospitality.com, everythinghospitality.com.

Tahiti Satin — All Colorways

Type II 20 oz · 52/54" · Random Match · 100% Vinyl / Osnaburg

PERFORMANCE

- Fire Rating: Class A, ASTM E84
- Europe CE Fire Tested
- Meets W-101 WA Quality Standard
- Meets CCC-W-408D scrub / wash / stain

SUSTAINABILITY

- Low-emitting — Cal 01350 (LEED EQ 4.2)
- Up to 40% recycled content
- No conflict minerals, heavy metals, solvents, phthalates
- PFC/PFOA-free · Solvent-free inks · Made in USA

AVAILABLE COLORWAYS



Grey
YFC-4218



Chestnut
YFC-4219



Oak
YFC-4220



Ash
YFC-4221



White Birch
YFC-4222